

MOTOR PROTECTION RELAY, PHASE FAILURE / SINGLE PHASE SENSITIVE. THREE POLE **Electric** (THREE PHASE), MANUAL OR AUTOMATIC RESETTING. DIRECT MOUNTING ON BF09 - BF38 **ENERGY AND AUTOMATION** CONTACTORS, 0.63...1A



| | | - | NA. to a section Co. |
|-----------------------------------|---------------------------|-------|------------------------|
| Product designation | | | Motor protection relay |
| Product type designation | | | RF38 |
| General characteristics | | | 111 00 |
| Number of poles | | nr. | 3 |
| Overvoltage category | | | |
| Pollution degree | | | 3 |
| Frontal IP degree | | | IP20 |
| Type of release | | | Thermal |
| Protection fuse | | | memai |
| 1 Totochori Tuse | gG (IEC) | Α | 4 A |
| | aM (IEC) | A | 2 A |
| | RK5 (UL) | A | 3 A |
| Phase failure detection | Title (GE) | - / \ | NO |
| - | | | Manual or |
| Reset mode | | | automatic |
| Power circuit characteristics | | | |
| Operating frequency | | | |
| | Operational frequency max | Hz | 400 1/s |
| Operating current | | | |
| | Operational current min | Α | 0.63 A |
| | Operational current max | Α | 1 A |
| Tripping class | | | 10A |
| Test Button | | | YES |
| Trip indicator | | | YES |
| Terminals | | | |
| | | | Screw and |
| | type | | washer |
| | screw | | M4 |
| | tool | | Phillips 2 |
| Conductor section | | | |
| | AWG max | | 8 |
| Auxiliary circuit characteristics | | | |
| Auxiliary contacts | | | |
| | NO | nr. | 1 |
| | NC | nr. | 1 |
| Operating current AC15 | | | |
| | 24V | Α | 3 A |
| | 120V | Α | 3 A |
| | 240V | Α | 1.5 A |
| | 380V | Α | 0.95 A |
| | 480V | Α | 0.75 A |
| | 500V | Α | 0.72 A |
| | 600V | Α | 0.6 A |
| Operating current DC13 | | | |




MOTOR PROTECTION RELAY, PHASE FAILURE / SINGLE PHASE SENSITIVE. THREE POLE electric (THREE PHASE), MANUAL OR AUTOMATIC RESETTING. DIRECT MOUNTING ON BF09 - BF38 CONTACTORS, 0.63...1A

| ENERGY | AND | AUTOMA | NOITA |
|--------|-----|--------|-------|
| | | | |


| | 125V | Α | 0.11 A |
|--|---------------------|---|-----------------------|
| | 600V | Α | 0.22 A |
| Conventional free air thermal current Ith | | Α | 10 A |
| Terminals | | | |
| | type | | Screw and washer |
| | screw | | M3,5 |
| | tool | | Phillips 2 |
| UL/CSA and IEC/EN 60947-5-1 designation | | | B600-R300 |
| Ambient conditions | | | |
| Max altitude | | m | 3000 |
| Mechanical feautures | | | |
| Operating position | | | |
| | normal allowable | | Vertical plan ±30° |
| Weight | | g | 0.16 kg |
| UL technical data | | | |
| Full-load current (FLA) for three-phase AC motor | | | |
| | at 480V | Α | 1 A |
| | at 600V | Α | 1 A |

Dimensions

BF00 A... BF09 A... - BF12 A... - BF18 A... - BF25 A... three poles with RF...38 thermal overload relay

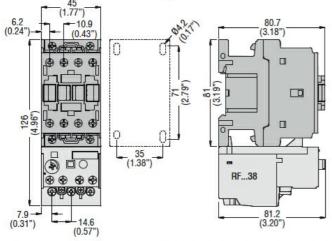

- BF32 00A... - BF38 00A... three poles with RF...38 thermal overload relay BF26 00A...

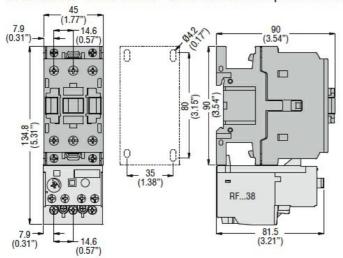


Wiring diagrams



MOTOR PROTECTION RELAY, PHASE FAILURE / SINGLE PHASE SENSITIVE. THREE POLE electric (THREE PHASE), MANUAL OR AUTOMATIC RESETTING. DIRECT MOUNTING ON BF09 - BF38 CONTACTORS, 0.63...1A

ENERGY AND AUTOMATION

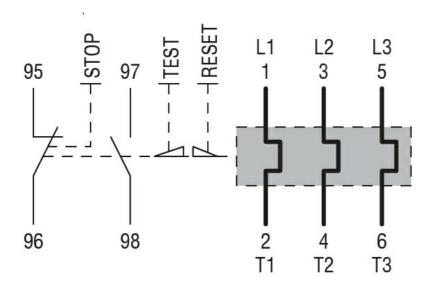

Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN 60947-1

IEC/EN 60947-4-1

UL508

Certifications

CCC

cULus

EAC