MOTOR PROTECTION RELAY, PHASE FAILURE / SINGLE PHASE SENSITIVE. THREE POLE **electric** (THREE PHASE), MANUAL OR AUTOMATIC RESETTING. DIRECT MOUNTING ON BF09 - BF38 **ENERGY AND AUTOMATION** CONTACTORS, 1...1.6A



Product designation			Motor protection relay
Product type designation			RF38
General characteristics			
Number of poles		nr.	3
Overvoltage category			III
Pollution degree			3
Frontal IP degree			IP20
Type of release			Thermal
Protection fuse			
	gG (IEC)	Α	4 A
	aM (IEC)	Α	2 A
	RK5 (UL)	Α	6 A
Phase failure detection			NO
Reset mode			Manual or
Power circuit characteristics			automatic
Operating frequency			
Operating nequency	Operational frequency max	Hz	400 1/s
Operating current	Operational frequency max	1 12	400 1/3
Operating current	Operational current min	Α	1 A
	Operational current max	A	1.6 A
Tripping class	operational durient max		10A
Test Button			YES
Trip indicator			YES
Terminals			
Tommale			Screw and
	type		washer
	screw		M4
	tool		Phillips 2
Conductor section			
	AWG max		8
Auxiliary circuit characteristics			
Auxiliary contacts			
	NO	nr.	1
	NC	nr.	1
Operating current AC15			_
	24V	Α	3 A
	120V	Α	3 A
	240V	Α	1.5 A
	380V	Α	0.95 A
	480V	Α	0.75 A
	500V	Α	0.72 A
Operating current DC13	600V	Α	0.6 A

1/3




MOTOR PROTECTION RELAY, PHASE FAILURE / SINGLE PHASE SENSITIVE. THREE POLE **electric** (THREE PHASE), MANUAL OR AUTOMATIC RESETTING. DIRECT MOUNTING ON BF09 - BF38 CONTACTORS, 1...1.6A


	125V	Α	0.11 A
	600V	Α	0.22 A
Conventional free air thermal current Ith		Α	10 A
Terminals			_
	type		Screw and washer
	screw		M3,5
	tool		Phillips 2
UL/CSA and IEC/EN 60947-5-1 designation			B600-R300
Ambient conditions			
Max altitude		m	3000
Mechanical feautures			
Operating position			
	normal allowable		Vertical plan ±30°
Weight		g	0.16 kg
UL technical data			
Full-load current (FLA) for three-phase AC motor			
	at 480V	Α	1.6 A
	at 600V	Α	1.6 A

Dimensions

BF00 A... BF09 A... - BF12 A... - BF18 A... - BF25 A... three poles with RF...38 thermal overload relay

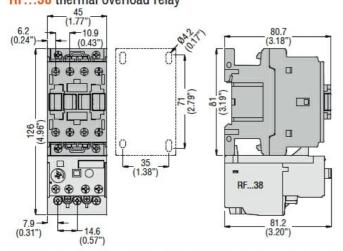


- BF32 00A... - BF38 00A... three poles with RF...38 thermal overload relay BF26 00A...

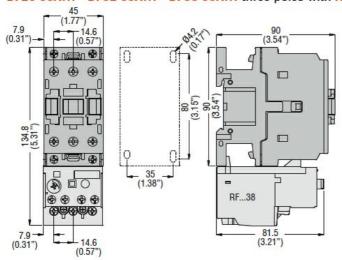

Wiring diagrams

MOTOR PROTECTION RELAY, PHASE FAILURE / SINGLE PHASE SENSITIVE. THREE POLE electric (THREE PHASE), MANUAL OR AUTOMATIC RESETTING. DIRECT MOUNTING ON BF09 - BF38 CONTACTORS, 1...1.6A

ENERGY AND AUTOMATION

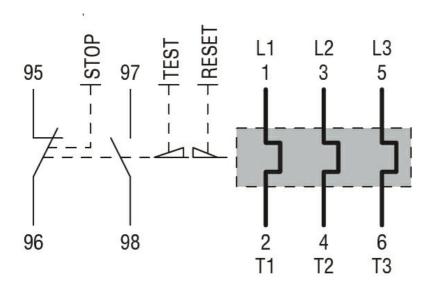

Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN 60947-1

IEC/EN 60947-4-1

UL508

Certifications

CCC

cULus

EAC