## SOFT STARTER, ADXL... TYPE, WITH INTEGRATED BY-PASS RELAY. AUXILIARY SUPPLY 100...240VAC. RATED OPERATIONAL VOLTAGE 208...600VAC, 320A



			"	9 9 9
Product designation				Soft starter
Product type designati	on			ADXL
Motor type				Asynchronous
				three phase
Electrical features				
Supplies voltage		<del>-</del> , .		<del>-</del>
		Type of system		Three phase
		Rated supply voltage	V	208600 VAC ±10%
				100240VAC
		auxiliary supply voltage (Us)		±10%
		Rated frequency	Hz	50/60
Rated starter current le	9		Α	320
Rated motor power				
	IEC ratings (T≤40°C)			
		230VAC	kW	90
		400VAC	kW	160
		500VAC	KW	200
	UL ratings (T≤40°C)			
		220-240VAC	HP	125
		380-415VAC	HP	200
		440-480VAC	HP	250
N. alara faratalla lalara		550-600VAC	HP	300
Number of controlled phases			N°	Yes
Built-in bypass Cooling System				Forced
Rated insulation voltag	o I li		V	600
Programming interface			V	600
	÷			Backlit icon LCD
Display				display
Programming with NFC	Ctechnology			Yes
Optical port	3,			Yes
Startup and stop settin	gs			
	-			Torque ramp with
				current limit,
Startup method				Voltage ramp with
·				current limit, Constant torque
				with current limit
				Torque ramp,
Stop method				voltage ramp,
				free-wheel stop
Protections				
A '!! 1 4				V/-1( ( 1-

Voltage too low


Auxiliary supply protection





SOFT STARTER, ADXL... TYPE, WITH INTEGRATED BY-PASS RELAY. AUXILIARY SUPPLY 100...240VAC. RATED OPERATIONAL VOLTAGE 208...600VAC, 320A

Power supply Protection			No power, phase loss, phase sequence, frequency out of limits, minimum and maximum voltage
Motor protection			Overload at starting (trip class 2, 10A, 10, 15, 20, 25, 30, 35 and 40), overload during running (trip class 2, 10A, 10, 15, 20, 25 and 30), locked rotor, current asymmetry, minimum torque (dry run), overtemperature, starting too long  Overcurrent,
Starter protection			overtemperature, bypass failure, phase shorted, temperature sensor fault, cooling fan fault, maintenance request
Input and Output			
Digital inputs	Number of digital input	n°	3 2 input with dry
	Digital input type		contact + 1 input with dry contact or PTC (configurable) Programmable (motor start, motor stop, freewheel stop, motor preheating,
	Digital input functions		commands lock, alarms inhibition, thermal status reset, keyboard lock, motor selection, user alarm, command)
Digital outputs	Number of digital output	n°	3







SOFT STARTER, ADXL... TYPE, WITH INTEGRATED BY-PASS RELAY. AUXILIARY SUPPLY 100...240VAC. RATED OPERATIONAL VOLTAGE 208...600VAC, 320A

		Digital output arrangement		2 x 1 NO (SPST) + 1 C/O (SPDT) Ratings: 2 x 1NO contacts: 3A 250VAC - 3A 30VDC 1 x C/O contact: NO contact 5A 250VAC - 5A 30VDC; NC contact 3A 250VAC - 3A 30VDC
		Digital output functions		Programmable (line contactor, run, global alarm, limits, remote variable, alarm Axx, user alarm Axx, OFF)
Ambient conditions				
Temperature				
	Operating temperature			
		min	°C	-20
				+60°C (with
		max	°C	current derating >40°C of 0.5%/ °C)
	Storage temperature			,
	Grorago romporarare	min	°C	-30
		max	°C	+80
		max		1000 without
Max altitude			m	derating (over 1000mt with current derating of 0.5%/100m)
Relative humidity			%	<80%
Pollution degree				2
Installation category				III
Housing				
Mounting				Screw-fixing
IP degree of protection				IP00
Dimensions (W x H x D)			mm	212 x 486 x 216
Weight	<i>')</i>		Kg	13.9
Dimensions			ivy	10.0
<del>ыныныыны</del>				

**ENERGY AND AUTOMATION** 

SOFT STARTER, ADXL... TYPE, WITH INTEGRATED BY-PASS RELAY. AUXILIARY SUPPLY 100...240VAC. RATED OPERATIONAL VOLTAGE 208...600VAC, 320A

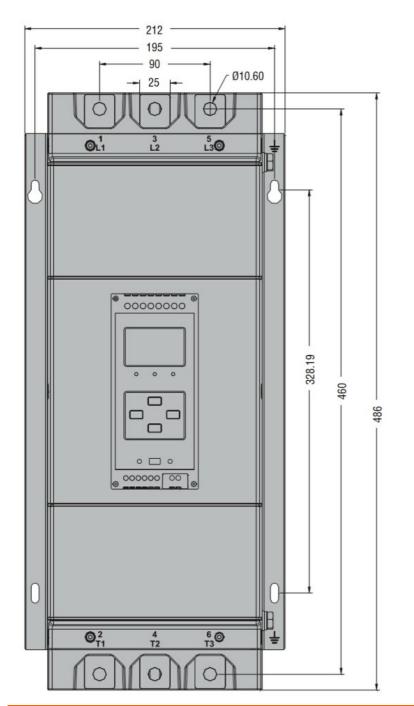

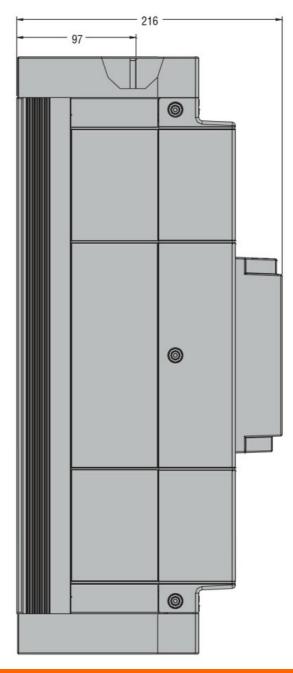

## Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN 60947-1

IEC/EN 60947-4-2

UL508

Certificates

cULus

EAC

RCM

ETIM classification

**ETIM 8.0** 

EC000640 - Soft starter