


Mains power protection

ESP D/DS 10A & 32A Series (Single phase)



*NOTE: product label design may vary.

Combined Type 1, 2 and 3 tested protector (to BS EN 61643) for use on low current (up to 10 or 32 A) single phase systems to protect connected electronic equipment from transient overvoltages on the mains supply, e.g. fire/intruder alarm panels. Available for 90-150 Volts, 200-280 Volts and 232-350 Volts supplies. For use at boundary LPZ 0 through to LPZ 3 boundaries to protect sensitive electronic equipment.



Features & benefits

- Very low let-through voltage (enhanced protection to IEC/BS EN 62305) between all sets of conductors (phase to neutral, phase to earth, neutral to earth - Full Mode protection)
- Repeated protection in lightning intense environments
- Compact space saving DIN housing for easy incorporation in the protected system
- Innovative multiple thermal disconnect technology for safe disconnection from faulty or abnormal supplies (without compromising protective performance)

- Three way visual indication of protection status and advanced pre-failure warning so you need never be unprotected
- Advanced status (DS) version has remote indication facility to a BMS via an active changeover volt-free contact to show pre-failure warnings and potential phase loss (i.e. power failure, blown fuses, etc.), and a flashing warning of potentially fatal neutral to earth supply volts

Installation

Connect in-line with the power supply usually either within the equipment panel (or for CCTV cameras, in an enclosure close by), or on the fused connection that supplies equipment.

To protect equipment inside a building from transients entering on an outgoing feed (e.g. to CCTV cameras or to site lighting) the protector should be installed as close to where the cable leaves the building as possible.

Protectors should be installed either within an existing cabinet/cubicle or in a separate enclosure.

Accessories

Weatherproof enclosure:

WBX D4

ABB Order code: 7TCA085410R0032

Application

Use these protectors on low current mains power supplies, e.g. CCTV cameras, alarm panels, industrial battery chargers and telemetry equipment.

Connect in-line on supplies fused up to 10 A (ESP 120D-10A, ESP 120DS-10A, ESP 240D-10A, ESP 240DS-10A, ESP 277D-10A or ESP 277DS-10A) or 32 A (ESP 120D-32A, ESP 120DS-32A, ESP 240D-32A, ESP 240DS-32A, ESP 277D-32A or ESP 277DS-32A).



NOTE: If your supply is fused at more than 32 Amps the ESP 120 M1, ESP 240 M1 or ESP 277 M1 are suitable.

ESP D/DS 10A & 32A Series (Single phase) - Technical specification

| Electrical specification | ESP 120D-10A ESP 120DS-10A | ESP 120D-32A ESP 120DS-32A | ESP 240D-10A ESP 240DS-10A | ESP 240D-32A ESP 240DS-32A | ESP 277D-10A ESP 277DS-10A | ESP 277D-32A ESP 277DS-32A |
|--|--|------------------------------------|------------------------------------|------------------------------------|------------------------------------|------------------------------------|
| ABB order code | 7TCA085460R0328 7TCA085460R0326 | 7TCA085460R0327 7TCA085460R0325 | 7TCA085460R0323 7TCA085460R0317 | 7TCA085460R0322 7TCA085460R0318 | 7TCA085460R0319 7TCA085460R0321 | 7TCA085460R0320 7TCA085460R0324 |
| Nominal voltage - Phase-Neutral U_o (RMS) | 120 V | | 240 V | | 277 V | |
| Maximum voltage - Phase-Neutral U_c (RMS) | 150 V | | 280 V | | 305 V | |
| Temporary Overvoltage TOV $U_T^{(1)}$ | 175 V / 229 V | | 337 V / 442 V | | 403 V / 529 V | |
| Short circuit withstand capability | 10 kA/50 Hz | | | | | |
| Working voltage (RMS) | 90-150 V | | 200-280 V | | 232-350 V | |
| Frequency range | 47-63 Hz | | | | | |
| Current rating (supply) | 10 A or less | 32 A or less | 10 A or less | 32 A or less | 10 A or less | 32 A or less |
| Max. back-up fuse (see installation instructions) | 10 A | 32 A | 10 A | 32 A | 10 A | 32 A |
| Leakage current (to earth) | Zero | | | | | |
| Indicator circuit current | < 10 mA | | | | | |
| Volt free contact (DS versions only): ⁽²⁾ | Screw terminal | | | | | |
| – Current rating | 1 A | | | | | |
| – Nominal voltage (RMS) | 250 V | | | | | |
| Transient specification | ESP 120D-10A ESP 120DS-10A | ESP 120D-32A ESP 120DS-32A | ESP 240D-10A ESP 240DS-10A | ESP 240D-32A ESP 240DS-32A | ESP 277D-10A ESP 277DS-10A | ESP 277D-32A ESP 277DS-32A |
| Type 1 (BS EN/EN), Class I (IEC) | | | | | | |
| Nominal discharge current 8/20 μ s (per mode) I_n | 20 kA | | | | | |
| Let-through voltage U_p at I_n | < 1 kV | | < 1.3 kV | | < 1.4 kV | |
| Impulse discharge current 10/350 μ s I_{imp} (L-N/E, N-E) ⁽⁴⁾ | 4 kA, 12.5 kA | | | | | |
| Total discharge current (total to earth) $I_{total}^{(4,5)}$ | 6.25 kA | | | | | |
| Type 2 (BS EN/EN), Class II (IEC) | | | | | | |
| Nominal discharge current 8/20 μ s (per mode) I_n | 20 kA | | | | | |
| Let-through voltage U_p at I_n | < 1 kV | | < 1.3 kV | | < 1.4 kV | |
| Maximum discharge current I_{max} (L-N/E, N-E) ⁽⁴⁾ | 40 kA, 40 kA | | | | | |
| Type 3 (BS EN/EN), Class III (IEC) | | | | | | |
| Let-through voltage at U_{oc} of 6 kV 1.2/50 μ s and I_{sc} of 3 kA 8/20 μ s (per mode) ^(3,6) | 400 V | | 600 V | | 680 V | |
| Mechanical specification | ESP 120D-10A ESP 120DS-10A | ESP 120D-32A ESP 120DS-32A | ESP 240D-10A ESP 240DS-10A | ESP 240D-32A ESP 240DS-32A | ESP 277D-10A ESP 277DS-10A | ESP 277D-32A ESP 277DS-32A |
| Temperature range ⁽⁸⁾ | -40 to +80 °C | | | | | |
| Connection type | Screw terminal - maximum torque 0.8 Nm ⁽⁷⁾ | | | | | |
| Conductor size (stranded) | 6 mm² | | | | | |
| Earth connection | Screw terminal - maximum torque 0.8 Nm ⁽⁷⁾ | | | | | |
| Volt free contact (DS versions only) | Connect via screw terminal with conductor up to 1.5 mm² (stranded) - maximum torque 0.25 Nm ⁽⁷⁾ | | | | | |
| Degree of protection (IEC 60529) | IP20 | | | | | |
| Case material | FR Polymer UL-94 V-0 | | | | | |
| Weight | 0.23 kg | | | | | |
| Dimensions to DIN 43880 - HxDxW ⁽⁹⁾ | 90 mm x 75 mm x 36 mm (2TE) | | | | | |

* To enclose the products to IP65, fit within a WDX D4, available from Furse.

⁽¹⁾ Temporary Overvoltage TOV rating is for durations of 5 seconds (withstand) and 120 minutes (safe fail) tested to BS EN/IEC 61643.

⁽²⁾ Minimum permissible load is 5 V DC, 10 mA to ensure reliable operation.

⁽³⁾ The maximum transient voltage let-through of the protector throughout the test ($\pm 10\%$).

⁽⁴⁾ The electrical system, external to the unit, may constrain the actual current rating achieved in a particular installation.

⁽⁵⁾ Rating is considered as the current capability of the protector for equipotential bonding near the service entrance.

⁽⁶⁾ Combination wave test within IEC/BS EN 61643, IEEE C62.41-2002 Location Cats C1 & B3, SS 555:2010, AS/NZS 1768-2007, UL 1449 mains wire-in.

⁽⁷⁾ Torque should typically be 50% to 75% of the maximum value.

⁽⁸⁾ Temperature range of SPD within a 20°C ambient temperature. An increase in ambient temperature will de-rate the SPD upper temperature limit accordingly.

⁽⁹⁾ The remote signal contact (removable) adds 10 mm to height.

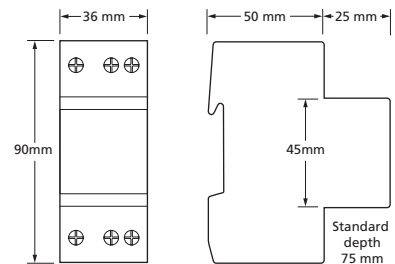


ABB Limited
Furse
Wilford Road
Nottingham
NG2 1EB UK
Tel: +44 (0) 115 964 3700

www.furse.com

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB AG does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilisation of its contents – in whole or in parts – is forbidden without prior written consent of ABB AG. Copyright© 2024 ABB
All rights reserved