






# CNE07

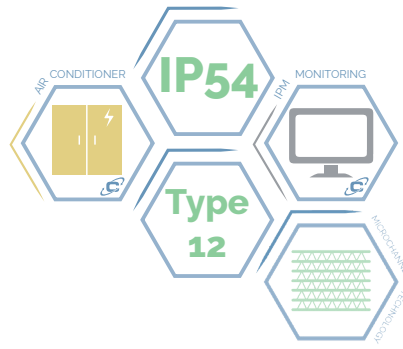

CODICE - CODE - ARTIKELNUMMER - CÒDIGO	M.U.	CNE070022080000	CNE070022880000	CNE07U122080000	CNE07U122880000	CNE07U120380000
UL LISTED		--	--	•	•	•
Tensione nominale - Rated voltage- Nennspannung -Tensión nominal	V, -	230, 1	400,2 460,2	230, 1	400,2 460,2	115, 1
Frequenza nominale - Nominal frequency - Nennfrequenz -Frecuencia nominal	Hz	50 60	50 60	50 60	50 60	60
Altezza - Larghezza - Profondità - Height - Width - Depth - Höhe - Breite - Tiefe - Altura - Anchura - Profundidad	mm	565x280x220	565x280x278	565x280x220	565x280x278	565x280x220
Potenza frigorifera-Cooling capacity-Kühlleistung - Potencia frigorífica	L35L35 W	660 670	645 655	-- 670	-- 655	625
Potenza frigorifera - Cooling capacity - Kühlleistung - Potencia frigorífica	W	450 490	440 480	-- 490	-- 480	460
Potenza assorbita - Power consumption - Leistungsaufnahme - Potencia absorbida	W	350 360	350 360	-- 360	-- 360	335
Max corrente assorbita - Max current consumption - Max Stromaufnahme - Corriente absorbida max.	A					
Corrente di avviamento - Start-up current - Anlaufstrom - Corriente de puesta en marcha	CE A					
Capacità di carico minima del circuito -Circuit minimum load capacity - Mindestbelastbarkeit des Kreislaufts - Capacidad de carga minima del circuito	UL A	--	--	-- 15	-- 15	15
Taratura del dispositivo di protezione - Protection device calibration - Kalibrierung der Schutzzeineinrichtung - Calibración del dispositivo de protección	CE A	4	4	4	4	--
	UL	--	--	-- 15	-- 15	15
Temp. interne di funzionamento - Internal operating temp. - Interne Betriebstemperatur - Temp. internas de funcionamiento	m i n / max °C	+20 / +45	+20 / +45	+20 / +45	+20 / +45	+20 / +45
Temp. esterne di funzionamento - External operating temp - Externe Betriebstemperatur - Temp. externas de funcionamiento	m i n / max °C	+20 / +55	+20 / +55	+20 / +55	+20 / +55	+20 / +50
Grado di protezione circuito interno - Internal circuit protection rating - Schutzgrad interner Kreislauf - Grado de protección del circuito interno	CE IP	54	54	54	54	--
	UL Type	--	--	-- 12	-- 12	12
Pressione sonora esterna - External sound pressure - Externer Schalldruck - Presión sonora externa	dB(A)	55	55	55	55	55
Peso - Weight - Gewicht - Peso	kg					

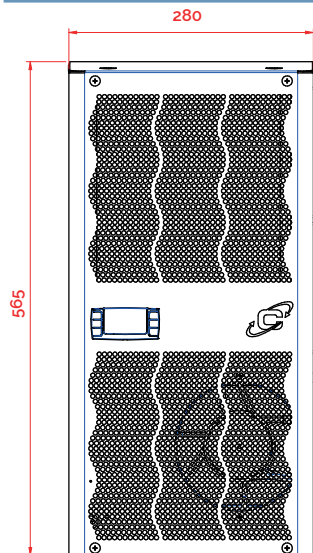

CNE07- 230V  
CNE07- 115V

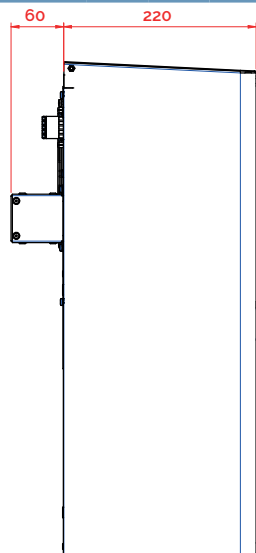

CNE07- 400V  
CNE07- 460V

