


Product data sheet

Specifications

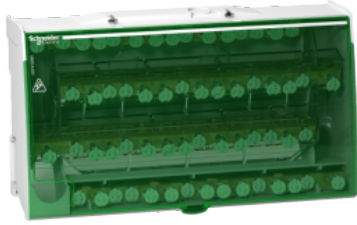

Linergy DS - screw distribution block 4P - 125A - 60 holes

LGY412560

Main

Range	Linergy
Product name	Linergy DS
Product or component type	Distribution block

Complementary

Mounting support	DIN rail
Range compatibility	Prisma G Prisma P Prisma PH Prisma Pack Spacial Kaedra Pragma TeSys ComPact
Product compatibility	Spacial enclosures
Poles description	4P
Distribution block outgoers	4 x 15 holes
[Ue] rated operational voltage	230 V AC Ph/N 440 V AC Ph/Ph
[Ui] rated insulation voltage	500 V AC
[Uimp] rated impulse withstand voltage	8 kV
[Ie] rated operational current	125 A at 40 °C
[Icw] rated short-time withstand current	4.2 kA for 1 s
[Ipk] rated peak withstand current	28 kA
Connections - terminals	Supply: screw terminal 1 cable(s) 10...35 mm ² rigid Supply: screw terminal 1 cable(s) 6...35 mm ² flexible with cable end Distribution: screw terminal 3 cable(s) 6...35 mm ² rigid Distribution: screw terminal 3 cable(s) 4...25 mm ² flexible with cable end Distribution: screw terminal 11 cable(s) 1.5...16 mm ² rigid Distribution: screw terminal 11 cable(s) 1.5...10 mm ² flexible with cable end
Tightening torque	Distribution: 2 N.m flat screwdriver 6.5 mm Distribution: 2 N.m PZ2 screwdriver 6.5 mm Supply: 2.5 N.m flat screwdriver 9.5 mm Supply: 2.5 N.m PZ2 screwdriver 9.5 mm Distribution: 2 N.m flat screwdriver 8.5 mm Distribution: 2 N.m PZ2 screwdriver 8.5 mm
9 mm pitches	20

Height	100 mm
Width	174 mm
Depth	50.5 mm
Net weight	0.562 kg
Colour	White (RAL 9003)

Environment

Pollution degree	3
Overvoltage category	III
Dielectric strength	2500 V
Standards	EN/IEC 60947-7-1 EN/IEC 61439-1
Ambient air temperature for operation	-25...55 °C

Packing Units

Unit Type of Package 1	Db
Number of Units in Package 1	1
Package 1 Height	5.6 cm
Package 1 Width	10.8 cm
Package 1 Length	18 cm
Package 1 Weight	613 g
Unit Type of Package 2	Doboz
Number of Units in Package 2	25
Package 2 Height	30 cm
Package 2 Width	30 cm
Package 2 Length	40 cm
Package 2 Weight	15.763 kg
Unit Type of Package 3	P12
Number of Units in Package 3	200
Package 3 Height	45 cm
Package 3 Width	80 cm
Package 3 Length	120 cm
Package 3 Weight	134.6 kg

Offer Sustainability

REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Compliant EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	China RoHS declaration Pro-active China RoHS declaration (out of China RoHS legal scope)
RoHS exemption information	Yes

WEEE

The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Contractual warranty

Warranty 18 months

Recommended replacement(s)