

Head for illuminated emergency switching off push button, Harmony XB4, metal, red mushroom 40mm, 22mm, universal LED, push-pull

Local distributor code:

389557261 ZB4BW643

Important message: A change in appearance may be noted on the product but does not affect its use in terms of function and safety. This makes it compatible with our Universal LED blocks

EAN Code: 3389110666618

#### Main

Range of product	Harmony XB4
Product or component type	Head for illuminated emergency switching off push-button
Device short name	ZB4
Product compatibility	Universal LED
Bezel material	Chromium plated metal
Head type	Standard
Mounting diameter	22.5 mm
Sale per indivisible quantity	1
Shape of signaling unit head	Round
Type of operator	mechanical latching
Reset	Push-pull
Operator profile	Red mushroom Ø 40 mm, unmarked
Cap/operator or lens colour	Red

### Complementary

CAD overall width	40 mm
CAD overall height	40 mm
CAD overall depth	53 mm
Product weight	0.051 kg
Resistance to high pressure washer	7000000 Pa at 55 °C, distance : 0.1 m
Mechanical durability	500000 cycles
Electrical composition code	M6 for <2 contacts using single blocks in front mounting with integral LED and transformer M10 for <2 contacts using single blocks in front mounting with integral LED M3 for <4 contacts using single blocks in front mounting with integral LED M4 for <4 contacts using single and double blocks in front mounting with integral LED
Device presentation	Basic sub-assemblies

#### **Environment**

Protective treatment	тн
Ambient air temperature for storage	-4070 °C

Ambient air temperature for operation	-4070 °C
Overvoltage category	Class I conforming to IEC 60536
IP degree of protection	IP66 conforming to IEC 60529 IP69 IP69K
NEMA degree of protection	NEMA 13 NEMA 4X
IK degree of protection	IK05 conforming to IEC 62262
Standards	JIS C8201-5-1 IEC 60364-5-53 IEC 60947-5-5 IEC 60947-5-1 IEC 60947-5-4 IEC 60947-1 CSA C22.2 No 14 UL 508 JIS C8201-1
Product certifications	BV CSA DNV LROS (Lloyds register of shipping) UL listed
Vibration resistance	5 gn (f= 2500 Hz) conforming to IEC 60068-2-6
Shock resistance	30 gn (duration = 18 ms) for half sine wave acceleration conforming to IEC 60068-2-27 50 gn (duration = 11 ms) for half sine wave acceleration conforming to IEC 60068-2-27

# **Packing Units**

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	4.3 cm
Package 1 Width	5.2 cm
Package 1 Length	5.6 cm
Package 1 Weight	53.0 g
Unit Type of Package 2	S02
Number of Units in Package 2	80
Package 2 Height	15 cm
Package 2 Width	30 cm
Package 2 Length	40 cm
Package 2 Weight	4.563 kg

# **Logistical informations**

Country of origin

# **Contractual warranty**

Warranty 18 months



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

#### Environmental Data explained >

How we assess product sustainability >

☑ Environmental footprint	
Carbon footprint (kg.eq.CO2 per CR, Total Life cycle)	1
Environmental Disclosure	Product Environmental Profile

#### **Use Better**


Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
China RoHS Regulation	China RoHS declaration

#### **Use Again**

○ Repack and remanufacture	
Circularity Profile	End of Life Information
Take-back	No

**Dimensions Drawings** 

### **Dimensions**



#### Mounting and Clearance


# Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)

Connectors or on Printed Circuit Board

(1)
(2)

Connection by Screw Clamp Terminals or Plug-in

**Connection by Faston Connectors** 



(1) Diameter on finished panel or support

(3)


- (2) 40 mm min. / 1.57 in. min.
- (3) 30 mm min. / 1.18 in. min.
- (4) Ø 22.5 mm / 0.89 in. recommended (Ø 22.3 mm  $_0^{+0.4}$  / 0.88 in.  $_0^{+0.016}$ )

(4)

- (5) 45 mm min. / 1.78 in. min.
- (6) 32 mm min. / 1.26 in. min.

### Pushbuttons, Switches and Pilot Lights for Printed Circuit Board Connection


#### Panel Cut-outs (Viewed from Installer's Side)

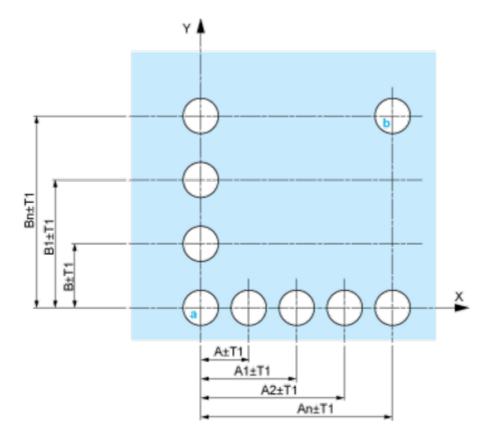


**A:** 30 mm min. / 1.18 in. min. **B:** 40 mm min. / 1.57 in. min.

Printed Circuit Board Cut-outs (Viewed from Electrical Block Side)

Dimensions in mm

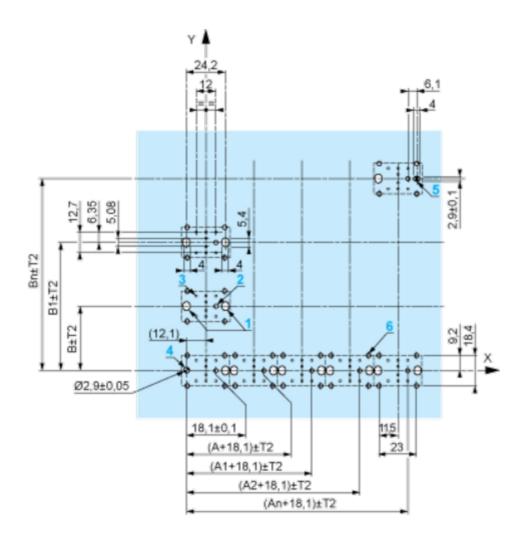

A: 30 mm min. B: 40 mm min. Dimensions in in.

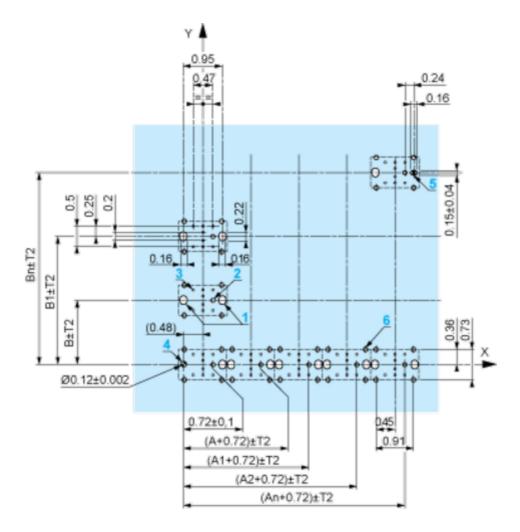

**A:** 1.18 in. min. **B:** 1.57 in. min.


#### General Tolerances of the Panel and Printed Circuit Board

The cumulative tolerance must not exceed 0.3 mm / 0.012 in: T1 + T2 = 0.3 mm max.

#### **Installation Precautions**

- $_{\bullet}$  Minimum thickness of circuit board: 1.6 mm / 0.06 in.
- Cut-out diameter: 22.4 mm ± 0.1 / 0.88 in. ± 0.004
- Orientation of body/fixing collar ZB4 BZ009: ± 2°30' (excluding cut-outs marked **a** and **b**).
- Tightening torque of screws ZBZ 006: 0.6 N.m (5.3 lbf.in) max.
- Allow for one ZB4 BZ079 fixing collar/pillar and its fixing screws:
  - $_{\circ}\;$  every 90 mm / 3.54 in. horizontally (X), and 120 mm / 4.72 in. vertically (Y).
  - o with each selector switch head (ZB4 BD•, ZB4 BJ•, ZB4 BG•).

The fixing centers marked a and b are diagonally opposed and must align with those marked 4 and 5.

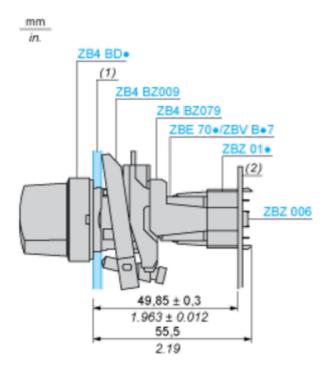

- (1) Panel
- (2) Printed circuit board

#### Mounting of Adapter (Socket) ZBZ 01•

- 1 2 elongated holes for ZBZ 006 screw access
- 2 1 hole Ø 2.4 mm ± 0.05 / 0.09 in. ± 0.002 for centring adapter ZBZ 01•
- 3 8 × Ø 1.2 mm / 0.05 in. holes
- 4 1 hole Ø 2.9 mm ± 0.05 / 0.11 in. ± 0.002, for aligning the printed circuit board (with cut-out marked a)
- 5 1 elongated hole for aligning the printed circuit board (with cut-out marked b)
- 6 4 holes Ø 2.4 mm / 0.09 in. for clipping in adapter ZBZ 01•

Dimensions An + 18.1 relate to the Ø 2.4 mm  $\pm$  0.05 / 0.09 in.  $\pm$  0.002 holes for centring adapter ZBZ 01•.

# **Product datasheet**

# **ZB4BW643**

**Technical Description** 

**Electrical Composition Corresponding to Code M3** 



### **Electrical Composition Corresponding to Code M4**



### **Electrical Composition Corresponding to Codes M6 and P2**



# **Product datasheet**

### **ZB4BW643**

Electrical Composition Corresponding to Codes M5, M10, MF1, MR1 and MF2



.ea	e	n	c

Single contact



Double contact



Light block




Possible location



#### **Technical Illustration**

#### **Dimensions**

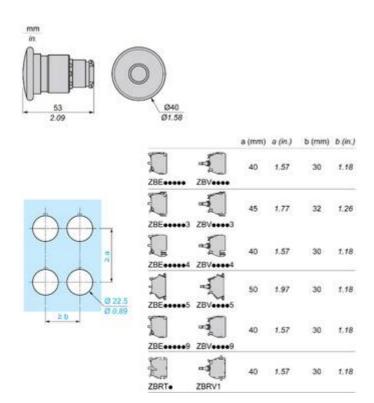

15


#### Offer Marketing Illustration

#### **Product benefits / Features**

16

# **Technical Benefits**

#### Harmony XB4

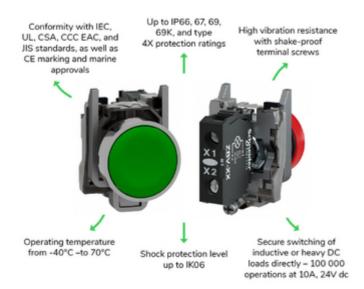

#### Offer Marketing Illustration

#### **Product benefits / Features**



Image of product / Alternate images

#### **Alternative**











