

Junction box

WKE 6 - Duo 7 x 6²



WKE 6 - Duo 7 x 6²

Junction box

Productnumber: 86742001


Dimensions: 200 x 250 x 120 mm

Junction box, protection class IP66, $U_i=450$ V AC, certified by VDE (DIN EN 60670-1/-22 (VDE 0606-1/-22)), UL-EU (EN 62208), knockouts, M20/M25/M32/M40, (4 rear, 12 side), external fixing lugs, with E30 - E 90 electrical functional integrity according to DIN 4102 Part 12. Halogen-free enclosure made of special thermoplastic, terminals made of high-temperature-resistant special ceramic, universally positionable terminal holder

orange, Connection box, 7-pole, 0.5 - 6 mm², junction box 7-pole 0.5 - 6 mm², number of clampable conductors per pole: 16 x 0.5² / 8 x 0.75² / 12 x 1² / 12 x 1.5² / 4 x 2.5² / 4 x 4² / 4 x 6²

Accessories supplied:

Cover retainer, screw anchors, 2 double membrane seals IP66 M20 sealing range 7 - 13 mm, 3 double membrane seals IP66 M25 sealing range 9 - 17 mm, 3 double membrane seals IP66 M32 sealing range 13 - 21 mm

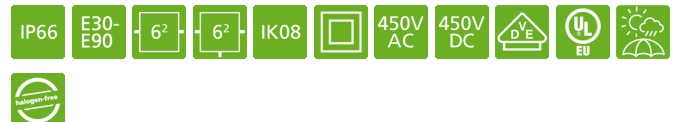

Technical Data

electrical characteristics

Rated insulation voltage AC:	450 V
Rated insulation voltage AC:	450 V
Rated insulation voltage DC:	450 V
Rated insulation voltage DC:	450 V
Min. conductor cross section:	0,5 mm ²
Min. conductor cross section:	0,5 mm ²
max. wire cross section (wire branching):	6 mm ²
max. wire cross section (wire branching):	6 mm ²
Min. conductor cross section:	0,5 mm ²
Min. conductor cross section:	0,5 mm ²
Max. conductor cross section:	6 mm ²
Max. conductor cross section:	6 mm ²
Protection class:	II
Protection class:	II
Type of protection:	IP66
Type of protection:	IP66
secured junction:	no
secured junction:	no
Circuit integrity class:	E30/E60/E90
Circuit integrity class:	E30/E60/E90
Number of poles (T-piece):	7
Number of poles (T-piece):	7
UL Type Rating:	other
UL Type Rating:	other
Number of fuses in T-piece:	0
Number of fuses in T-piece:	0

Colours

Base unit colour:	orange
-------------------	--------

Colours

Base unit colour:	orange
Cover colour:	orange
Cover colour:	orange

Additional features

Range of application:	Connectors and T-pieces
Range of application:	Connectors and T-pieces

Dimensions

Width:	200 mm
Width:	200 mm
Length:	250 mm
Length:	250 mm
Height:	120 mm
Height:	120 mm
Inner length:	235 mm
Inner length:	235 mm
Inner width:	185 mm
Inner width:	185 mm
Inner height:	102 mm
Inner height:	102 mm
Weight:	1.363 kg
Weight:	1.363 kg

Material characteristics

UV-resistant:	yes
UV-resistant:	yes
Halogen free:	yes
Halogen free:	yes
Flammability class according with UL94:	V0
Flammability class according with UL94:	V0
Glow-wire flammability according to EN 60695-2-11:	960 °C
Glow-wire flammability according to EN 60695-2-11:	960 °C

mechanical properties

Type of fastening:	Wall/ceiling mounting
Type of fastening:	Wall/ceiling mounting
Impact strength:	IK08
Impact strength:	IK08
Sealable:	yes
Sealable:	yes
Fastening:	external fixing lugs
Fastening:	external fixing lugs

Ambient conditions

max. relative humidity 25°C:	95 %
max. relative humidity 25°C:	95 %
max. relative humidity 40°C:	50 %
max. relative humidity 40°C:	50 %
Min. ambient temperature:	-35 °C
Min. ambient temperature:	-35 °C
Max. ambient temperature:	80 °C
Max. ambient temperature:	80 °C
24h ambient temperature:	60 °C
24h ambient temperature:	60 °C
Installation location:	protected outdoor areas

Ambient conditions

Installation location:	protected outdoor areas
------------------------	-------------------------

Sales Information

EAN:	4013902631179
EAN:	4013902631179
Packing Unit Code:	C62
Packing Unit Code:	C62
ETIM Class:	EC002600
ETIM Class:	EC002600
Custom tariff number:	85369095
Custom tariff number:	85369095

Material

Base unit material:	Polycarbonate
Base unit material:	Polycarbonate
Cover material:	Polycarbonate
Cover material:	Polycarbonate
Sealing material:	Polyurethane
Sealing material:	Polyurethane
Cover screw material:	Stainless steel V2A
Cover screw material:	Stainless steel V2A

Certificates

Test mark:	VDE (DIN EN 60670-1/-22 (VDE 0606-1/-22))
Test mark:	VDE (DIN EN 60670-1/-22 (VDE 0606-1/-22))
Test mark:	UL-EU (EN 62208)
Test mark:	UL-EU (EN 62208)

Accessories

[26062001 - DMS M20/or - Double-membrane seals](#)

[26062501 - DMS M25/or - Double-membrane seals](#)

[26063201 - DMS M32/or - Double-membrane seals](#)

[26064001 - DMS M40/or - Double-membrane seals](#)

[22762001 - KVR M20-MGM/or - Cable gland](#)

[22762501 - KVR M25-MGM/or - Cable gland](#)

[22763201 - KVR M32-MGM/or - Cable gland](#)

[22764001 - KVR M40-MGM/or - Cable gland](#)

[86310001 - WKE BK 1 - Mounting plate](#)

Cable gland

