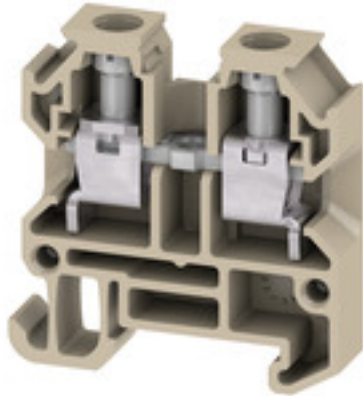


**AKZ 4****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Product image**

To feed through power, signal, and data is the classical requirement in electrical engineering and panel building. The insulating material, the connection system and the design of the terminal blocks are the differentiating features. A feed-through terminal block is suitable for joining and/or connecting one or more conductors. They could have one or more connection levels that are on the same potential or insulated against one another.

**General ordering data**

|            |  |
|------------|--|
| Version    | Feed-through terminal block, Screw connection, dark beige, 4 mm <sup>2</sup> , 32 A, 400 V, Number of connections: 2 |
| Order No.  | <a href="#">0294360000</a>   |
| Type       | AKZ 4  |
| GTIN (EAN) | 4008190054625  |
| Qty.       | 100 pc(s).   |

## AKZ 4

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Dimensions and weights

|                          |            |                |            |
|--------------------------|------------|----------------|------------|
| Depth                    | 29 mm      | Depth (inches) | 1.142 inch |
| Depth including DIN rail | 30.5 mm    | Height         | 28.5 mm    |
| Height (inches)          | 1.122 inch | Width          | 6.1 mm     |
| Width (inches)           | 0.24 inch  | Net weight     | 4.55 g     |

## Temperatures

|                                  |                |                                  |               |
|----------------------------------|----------------|----------------------------------|---------------|
| Storage temperature              | -25 °C...55 °C | Ambient temperature              | -5 °C...40 °C |
| Continuous operating temp., min. | -60 °C         | Continuous operating temp., max. | 130 °C        |

## Material data

|                           |       |        |            |
|---------------------------|-------|--------|------------|
| Material                  | Wemid | Colour | dark beige |
| UL 94 flammability rating | V-0   |        |            |

## Rating data IECEx/ATEX

|                    |               |                     |          |
|--------------------|---------------|---------------------|----------|
| Marking EN 60079-7 | Ex eb II C Gb | Ex 2014/34/EU label | II 2 G D |
|--------------------|---------------|---------------------|----------|

## System specifications

|                                     |   |                               |     |
|-------------------------------------|---|-------------------------------|-----|
| Version                             | Screw connection, for screwable cross-connection, One end without connector | End cover plate required      | Yes |
| Number of potentials                | 1   | Number of levels              | 1   |
| Number of clamping points per level | 2   | Number of potentials per tier | 1   |
| Levels cross-connected internally   | No  | PE connection                 | No  |
| Rail                                | TS 15   | N-function                    | No  |
| PE function                         | No  | PEN function                  | No  |

## 2 clampable conductors (H05V/H07V) with equal cross-section (rated connection)

|   |                     |   |                     |
|---|---------------------|---|---------------------|
| Cross-section for connected wire, solid, two clampable wires, max.    | 1.5 mm <sup>2</sup> | Cross-section for connected wire, solid, two clampable wires, min.    | 0.5 mm <sup>2</sup> |
| Cross-section for connected wire, stranded, two clampable wires, max. | 1.5 mm <sup>2</sup> | Cross-section for connected wire, stranded, two clampable wires, min. | 0.5 mm <sup>2</sup> |

## Additional technical data

|                          |       |                             |         |
|--------------------------|-------|-----------------------------|---------|
| Explosion-tested version | Yes   | Number of similar terminals | 1       |
| Open sides               | right | Type of mounting            | Snap-on |

## Conductors for clamping (additional connection)

|  |                  |
|--|------------------|
| Connection type, additional connection | Screw connection |
|--|------------------|

## AKZ 4

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Conductors for clamping (rated connection)

|   |                      |   |                     |
|---|----------------------|---|---------------------|
| Blade size  | 0.6 x 3.5 mm         | Clamping range, max.  | 6 mm <sup>2</sup>   |
| Clamping range, min.  | 0.13 mm <sup>2</sup> | Clamping screw  | M 3                 |
| Connection cross-section, stranded, max.  | 4 mm <sup>2</sup>    | Connection cross-section, stranded, min.  | 1.5 mm <sup>2</sup> |
| Connection direction  | on side              | Gauge to IEC 60947-1  | A3                  |
| Number of connections   | 2                    | Stripping length  | 8 mm                |
| Tightening torque, max.   | 0.8 Nm               | Tightening torque, min.   | 0.6 Nm              |
| Torque level with DMS electric screw-driver   | 2                    | Twin wire-end ferrules, max.  | 1.5 mm <sup>2</sup> |
| Twin wire-end ferrules, min.  | 0.5 mm <sup>2</sup>  | Type of connection  | Screw connection    |
| Wire connection cross section AWG, max.   | AWG 12               | Wire connection cross section AWG, min.   | AWG 24              |
| Wire connection cross section, finely stranded, max.                                    | 4 mm <sup>2</sup>    | Wire connection cross section, finely stranded, min.                                    | 0.5 mm <sup>2</sup> |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, max. | 2.5 mm <sup>2</sup>  | Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, min. | 0.5 mm <sup>2</sup> |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, max. | 2.5 mm <sup>2</sup>  | Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, min. | 0.5 mm <sup>2</sup> |
| Wire connection cross-section, solid core, max.   | 6 mm <sup>2</sup>    | Wire connection cross-section, solid core, min.   | 0.5 mm <sup>2</sup> |

## Dimensions

|              |         |
|--------------|---------|
| TS 15 offset | 13.5 mm |
|--------------|---------|

## General

|   |               |   |        |
|---|---------------|---|--------|
| Number of poles                         | 1             | Rail                                    | TS 15  |
| Standards                               | IEC 60947-7-1 | Wire connection cross section AWG, max. | AWG 12 |
| Wire connection cross section AWG, min. | AWG 24        |   |        |

## Rating data

|  |                   |                                 |               |
|--|-------------------|---------------------------------|---------------|
| Rated cross-section                          | 4 mm <sup>2</sup> | Rated voltage                   | 400 V         |
| Rated DC voltage                             | 400 V             | Rated current                   | 32 A          |
| Current at maximum wires                     | 41 A              | Standards                       | IEC 60947-7-1 |
| Volume resistance according to IEC 60947-7-x | 1 mΩ              | Rated impulse withstand voltage | 6 kV          |
| Power loss in accordance with IEC 60947-7-x  | 1.02 W            | Pollution severity              | 3             |

## Classifications

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC000897    | ETIM 7.0    | EC000897    |
| ETIM 8.0    | EC000897    | ETIM 9.0    | EC000897    |
| ETIM 10.0   | EC000897    | ECLASS 9.0  | 27-14-11-20 |
| ECLASS 9.1  | 27-14-11-20 | ECLASS 10.0 | 27-14-11-20 |
| ECLASS 11.0 | 27-14-11-20 | ECLASS 12.0 | 27-14-11-20 |
| ECLASS 13.0 | 27-25-01-01 | ECLASS 14.0 | 27-25-01-01 |
| ECLASS 15.0 | 27-25-01-01 |             |             |

**AKZ 4****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Technical data****Environmental Product Compliance**

|                        |                             |
|------------------------|-----------------------------|
| RoHS Compliance Status | Compliant without exemption |
| REACH SVHC             | No SVHC above 0.1 wt%       |

**Approvals**

|      |         |
|------|---------|
| ROHS | Conform |
|------|---------|

**Downloads**


|   |   |
|---|---|
| Approval/Certificate/Document of Conformity | <a href="#">Attestation Of Conformity</a><br><a href="#">UKCA Ex Attestation of Conformity</a><br><a href="#">CB Certificate</a><br><a href="#">CB Testreport</a><br><a href="#">ATEX Certificate</a><br><a href="#">IECEX Certificate</a><br><a href="#">INMETRO certificate</a><br><a href="#">CCC Ex Certificate</a><br><a href="#">UKCA Ex Certificate</a><br><a href="#">Declaration of Conformity</a><br><a href="#">UKCA declaration of conformity</a> |
| Engineering Data                            | <a href="#">CAD data – STEP</a>   |
| Product Change Notification                 | <a href="#">PCN_AKZ_20190405</a>  |
| User Documentation                          | <a href="#">NTI AKZ 4</a><br><a href="#">StorageConditionsTerminalBlocks</a>  |
| Catalogues                                  | <a href="#">Catalogues in PDF-format</a>  |
| Brochures                                   |   |

### AKZ 4

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Drawings



## AKZ 4

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

## SAK-Series



Warning covers with a flash symbol provide more safety for man and machine. They are used where external voltage must be indicated within the application.

## General ordering data

| Type       | AD 4 AKZ4                  | Version  |
|------------|----------------------------|--|
| Order No.  | <a href="#">0303400000</a> | Terminal cover, yellow, PVC, Height: 24.2 mm, Width: 20 mm, Depth: |
| GTIN (EAN) | 4008190068158              | 1 mm, V-2  |
| Qty.       | 50 pc(s).                  |  |

## Q / AKZ



Screwable cross-connections are easy to mount and de mount. Thanks to the big contact surface, even high currents can be transmitted with maximum contact reliability.

## General ordering data

| Type       | Q 10 AKZ4                  | Version  |
|------------|----------------------------|--|
| Order No.  | <a href="#">0368600000</a> | Cross-connector (terminal), when screwed in, grey, 24 A, Number of poles: 10, Pitch in mm (P): 6.10, Insulated: No, Width: 59.9 mm |
| GTIN (EAN) | 4008190056766              |  |
| Qty.       | 20 pc(s).                  |  |
| Type       | Q 3 AKZ4                   | Version  |
| Order No.  | <a href="#">0336500000</a> | Cross-connector (terminal), when screwed in, grey, 24 A, Number of poles: 3, Pitch in mm (P): 6.10, Insulated: No, Width: 17.2 mm  |
| GTIN (EAN) | 4008190121730              |  |
| Qty.       | 50 pc(s).                  |  |
| Type       | Q 2 AKZ4                   | Version  |
| Order No.  | <a href="#">0336400000</a> | Cross-connector (terminal), when screwed in, grey, 24 A, Number of poles: 2, Pitch in mm (P): 6.10, Insulated: No, Width: 11.1 mm  |
| GTIN (EAN) | 4008190037680              |  |
| Qty.       | 50 pc(s).                  |  |
| Type       | Q 4 AKZ4                   | Version  |
| Order No.  | <a href="#">0336600000</a> | Cross-connector (terminal), when screwed in, grey, 24 A, Number of poles: 4, Pitch in mm (P): 6.10, Insulated: No, Width: 23.3 mm  |
| GTIN (EAN) | 4008190096656              |  |
| Qty.       | 50 pc(s).                  |  |

## AKZ 4

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

## Testsockets



Test adapters and test plugs are used for the electrical connection between terminal blocks and the test equipment. In this way, an electrical contact can be established in the wired state and measurements can be done easily.

## General ordering data

|            |                            |                     |
|------------|----------------------------|---------------------|
| Type       | STB 8.5/D4/2.3/M2.5 AKZ    | Version             |
| Order No.  | <a href="#">0215700000</a> | Accessories, Socket |
| GTIN (EAN) | 4008190184872              |                     |
| Qty.       | 50 pc(s).                  |                     |

## SAK-Series



A partition plate is used for the optical separation of circuits or used for electrical isolation from neighbouring cross-connectors. In contrast to the end plate, the contour can be larger than the adjacent terminal blocks. However, it should not be smaller, as otherwise the required clearance and creepage distances within the application can no longer be maintained.

## General ordering data

|            |                            |  |
|------------|----------------------------|--|
| Type       | TSCH 4 AKZ4                | Version  |
| Order No.  | <a href="#">0363360000</a> | Small partition (terminal), PA 66, beige, Continuous operating temp., max.: 100 °C |
| GTIN (EAN) | 4008190136680              |  |
| Qty.       | 100 pc(s).                 |  |
| Type       | TW AKZ4                    | Version  |
| Order No.  | <a href="#">0348260000</a> | Partition plate (terminal), dark beige, Height: 47 mm, Width: 0.6 mm, V-2, PA 66   |
| GTIN (EAN) | 4008190128241              |  |
| Qty.       | 50 pc(s).                  |  |

## AKZ 4

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

## DEK 5/6



## WS/ DEK

MultiMark terminal markers use an innovative composite material made from two components. The hard base contour of the marker snaps securely into the connector. The elastic surface finish makes the marker easy to mount. This specially punched material enables the strips to be stretched to accommodate the slight variations in spacing that tend to add up, especially with long terminal blocks. Another advantage: the excellent printability of the surface material guarantees durable and wear-resistant labelling. A print resolution of 300 dpi also produces a very legible script.

## Your benefits with MultiMark

- Firm hold and durable printing
- Continuous strips save installation time
- Easy mounting thanks to an innovative composite material
- Large label field for optimal legibility
- High flexibility thanks to manufacturer independence

## General ordering data

|            |                            |  |
|------------|----------------------------|--|
| Type       | DEK 5/6 MM WS              | Version  |
| Order No.  | <a href="#">2007120000</a> | Dekafix, Terminal marker, 5 x 6 mm, Weidmueller, white |
| GTIN (EAN) | 4050118392104              |  |
| Qty.       | 600 pc(s).                 |  |

## Test plugs



Test adapters and test plugs are used for the electrical connection between terminal blocks and the test equipment. In this way, an electrical contact can be established in the wired state and measurements can be done easily.

## General ordering data

|            |                            |                                       |
|------------|----------------------------|---------------------------------------|
| Type       | PS 2.3 RT                  | Version                               |
| Order No.  | <a href="#">0180400000</a> | Test adapter (terminal), 230 V, 20 mA |
| GTIN (EAN) | 4008190060121              |                                       |
| Qty.       | 20 pc(s).                  |                                       |



## AKZ 4

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

## Blank



The Dekafix (DEK) marker is the universal marker for all conductor and plug-in connectors as well as for electronic sub-assemblies. The system is ideal for short number sequences and covers a wide range of ready-printed markers.

Strips for fast installation in only one work step. The printing is easy to read, rich in contrast and available in various widths.

- Large range of ready-to-use markers
- Strips for fast installation
- Terminal markers, suitable for all Weidmüller cable connectors
- Available as blank MultiCard or with standard printing

**For custom printing:** Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

## General ordering data

|            |                            |   |
|------------|----------------------------|---|
| Type       | DEK 5/6 MC NE WS           | Version   |
| Order No.  | <a href="#">1609820000</a> | Dekafix, Terminal marker, 5 x 6 mm, Pitch in mm (P): 6.00 |
| GTIN (EAN) | 4008190203436              | Weidmueller, white  |
| Qty.       | 1,000 pc(s).               |   |

## SAK-Series



End plates are fitted to the open side of the last modular terminal before the end bracket. The use of an end plate ensures the function of the modular terminal and the specified rated voltage. It guarantees protection against contact with live parts and makes the final terminal finger-proof.

## General ordering data

|            |                            |  |
|------------|----------------------------|--|
| Type       | AP AKZ4                    | Version  |
| Order No.  | <a href="#">0294460000</a> | End plate for terminals, dark beige, Height: 27 mm, Width: 1.5 mm,   |
| GTIN (EAN) | 4008190466268              | V-O, Wemid, Snap-on: Yes   |
| Qty.       | 20 pc(s).                  |  |
| Type       | AP AKZ4 BL                 | Version  |
| Order No.  | <a href="#">0294480000</a> | End plate for terminals, blue, Height: 27 mm, Width: 1.5 mm, V-2, PA |
| GTIN (EAN) | 4008190021832              | 66, Snap-on: Yes   |
| Qty.       | 20 pc(s).                  |  |

## AKZ 4

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

## TS 15

TS 15

Weidmüller's range of products includes end brackets that guarantee a permanent, reliable mounting on the terminal rail and prevent sliding. Versions with and without screws are available. The end brackets include marking options, also for group markers, and also a test plug holder.

## General ordering data

|            |                            |  |
|------------|----------------------------|--|
| Type       | EW 15                      | Version  |
| Order No.  | <a href="#">0382860000</a> | End bracket, beige, TS 15, V-2, Polyamide 66, Width: 10 mm, 100 °C |
| GTIN (EAN) | 4008190187804              |  |
| Qty.       | 50 pc(s).                  |  |

## Marker holder



The marker holder offer the possibility of additional mounting of standard markers with a pitch of 5 or 5.1 mm. The angled holders can be optionally snapped together and could be mounted in all standard marking channels of the Klippon® Connect modular terminal blocks. Fitting marker types could be found under the respective accessories of the designation marking holder.

## General ordering data

|            |                            |                            |
|------------|----------------------------|----------------------------|
| Type       | BZT 1 ZA WS 10/5           | Version                    |
| Order No.  | <a href="#">1805520000</a> | Accessories, Marker holder |
| GTIN (EAN) | 4032248270248              |                            |
| Qty.       | 100 pc(s).                 |                            |
| Type       | BZT 1 WS 10/5              | Version                    |
| Order No.  | <a href="#">1805490000</a> | Accessories, Marker holder |
| GTIN (EAN) | 4032248270231              |                            |
| Qty.       | 100 pc(s).                 |                            |