


Data sheet

Commercial Art.No.: 5D.S03.7055.5

multi-tier terminal WTN 2.5 E RT

multi-tier terminal WTN 2.5 E RT rated voltage 800 V, rated current 24 A, screw connection, number of levels 2, number of clamp positions per level 2, nominal cross section 2.5 mm², connectable conductor cross section fine stranded without cable end sleeve 0,34mm² - 2,5mm², mounting method DIN rail (top hat rail), color red, width/grid dimension 5.1 mm, inflammability class of insulation material acc. with ul94 V0

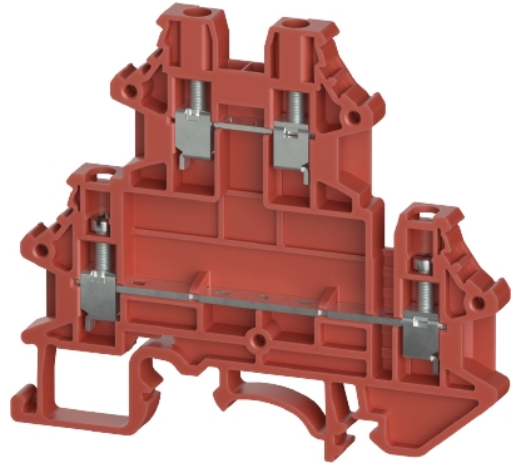

Commercial Art.No.	5D.S03.7055.5
EAN	4049088724756
Order Unit	100

certificates / approvals



LR

Technical data

general

nominal cross section	2.5 mm ²
color	red
number of levels	2
number of clamp positions per level	2
width/grid dimension	5.1 mm
insulating housing	PA
inflammability class of insulation material acc. with UL94	V0
mounting method	DIN rail (top hat rail)
Anschlussart	screw connection
Anzahl der Klemmstellen je Etage	2
Montageart	DIN rail (top hat rail)
Brennbarkeitsklasse des Isolierstoffs	V0

technical data

rated current	24 A
rated voltage	800 V
rated impulse voltage	8 kV
pollution degree	3
closing plate required	yes
type of insulation material	thermoplastic
length	71.5 mm
width	5.1 mm
height	63 mm

connection data

connection type	screw connection
connection type 1	screw connection
connection type 2	screw connection
minimum cross section solid	0.34 mm ²
maximum cross section solid	4 mm ²
minimum cross section fine stranded	0.34 mm ²
maximum cross section fine stranded	2.5 mm ²
minumum conductor cross section (flex., stranded) with cable end sleeve	0.25 mm ²
maximum conductor cross section (flex., stranded) with cable end sleeve	2.5 mm ²
wire strip length	10 mm
torque conductor mounting	0.4 Nm

technical data UL/CSA

cross section UL	22-12 AWG
voltage UL	600 V
current factory wiring	20 A
current field wiring	20 A
cross section CSA	22-12 AWG
voltage CSA	600 V
current CSA	20 A

classification

ETIM 9.0	EC000897
----------	----------


product compliance

REACH-SVHC conformity status	compliant
------------------------------	-----------

Accessories

Commercial Art.No.:	Article-type description:	Description:
0D.S03.3227.5	jumper bar IVB WTN 2,5-2	jumper bar IVB WTN 2,5-2 modular spacing 5.1 mm, insulated yes, number of poles 2, color red, height 20.3 mm, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.S03.3327.5	jumper bar IVB WTN 2,5-3	jumper bar IVB WTN 2,5-3 modular spacing 5.1 mm, insulated yes, number of poles 3, color red, height 20.3 mm, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.S03.3427.5	jumper bar IVB WTN 2,5-4	jumper bar IVB WTN 2,5-4 modular spacing 5.1 mm, insulated yes, number of poles 4, color red, height 20.3 mm, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.S03.3527.5	jumper bar IVB WTN 2,5-5	jumper bar IVB WTN 2,5-5 modular spacing 5.1 mm, insulated yes, number of poles 5, color red, height 20.3 mm, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.S03.4027.5	jumper bar IVB WTN 2,5-10	jumper bar IVB WTN 2,5-10 modular spacing 5.1 mm, insulated yes, number of poles 10, color red, height 20.3 mm, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.S03.5027.5	jumper bar IVB WTN 2,5-20	jumper bar IVB WTN 2,5-20 modular spacing 5.1 mm, insulated yes, number of poles 20, color red, height 20.3 mm, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0

0D.S13.3227.5	jumper bar IVB WTN 2.5P2	jumper bar IVB WTN 2.5P2 modular spacing 10 mm, insulated yes, number of poles 2, color red, height 20.28 mm, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.S13.3327.5	jumper bar IVB WTN 2.5P3	jumper bar IVB WTN 2.5P3 modular spacing 10 mm, insulated yes, number of poles 3, color red, height 20.28 mm, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.S13.3427.5	jumper bar IVB WTN 2.5P4	jumper bar IVB WTN 2.5P4 modular spacing 10 mm, insulated yes, number of poles 4, color red, height 20.28 mm, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.S13.3527.5	jumper bar IVB WTN 2.5P5	jumper bar IVB WTN 2.5P5 modular spacing 10 mm, insulated yes, number of poles 5, color red, height 20.28 mm, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.S03.5955.5	test plug PS 2.5 WTN	test plug PS 2.5 WTN number of clamp positions per level 1, mounting method pluggable, color red, width/grid dimension 5.1 mm, inflammability class of insulation material acc. with ul94 V0
0D.S03.6955.9	lever LVWTN 2.5/4	lever LVWTN 2.5/4 length 13.2 mm, height 22.5 mm, material plastic, color orange, inflammability class of insulation material acc. with ul94 V0
0D.S03.2355.0	end plate APWTN 2.5/4 E	end plate inflammability class of insulation material acc. with ul94 V0, type of end plate yes, thickness 1.2 mm, length 70 mm, color grey
0D.S04.1055.9	partition TW 001 WTN	partition inflammability class of insulation material acc. with ul94 V0, type of end plate no, thickness 0.8 mm, length 15.8 mm, color grey
0D.202.7281.0	marking strips WML 9.8/60	marking strips WML 9.8/60 material plastic, color white, length 230 mm, height 15.1 mm, inflammability class of insulation material acc. with ul94 V0
0D.203.7056.0	marking plate WMP 5,10-10	marking plate WMP 5,10-10 modular spacing 5.1 mm, material plastic, color white, length 128 mm, height 76 mm, inflammability class of insulation material acc. with ul94 V0
0D.S23.3227.0	insert bridge IVB WTN 2.5-2 IN	insert bridge IVB WTN 2.5-2 IN modular spacing 5.1 mm, insulated yes, number of poles 2, color grey, height 19 mm, mounting method screwable, inflammability class of insulation material acc. with ul94 V0
0D.S23.3327.0	insert bridge IVB WTN 2.5-3 IN	insert bridge IVB WTN 2.5-3 IN modular spacing 5.1 mm, insulated yes, number of poles 3, color grey, height 19 mm, mounting method screwable, inflammability class of insulation material acc. with ul94 V0
0D.S23.3427.0	insert bridge IVB WTN 2.5-4 IN	insert bridge IVB WTN 2.5-4 IN modular spacing 5.1 mm, insulated yes, number of poles 4, color grey, height 19 mm, mounting method screwable, inflammability class of insulation material acc. with ul94 V0
0D.S23.3527.0	insert bridge IVB WTN 2.5-5 IN	insert bridge IVB WTN 2.5-5 IN modular spacing 5.1 mm, insulated yes, number of poles 5, color grey, height 19 mm, mounting method screwable, inflammability class of insulation material acc. with ul94 V0
0D.S23.4027.0	insert bridge IVB WTN 2.5-10 IN	insert bridge IVB WTN 2.5-10 IN modular spacing 5.1 mm, insulated yes, number of poles 10, color grey, height 19 mm, mounting method screwable, inflammability class of insulation material acc. with ul94 V0

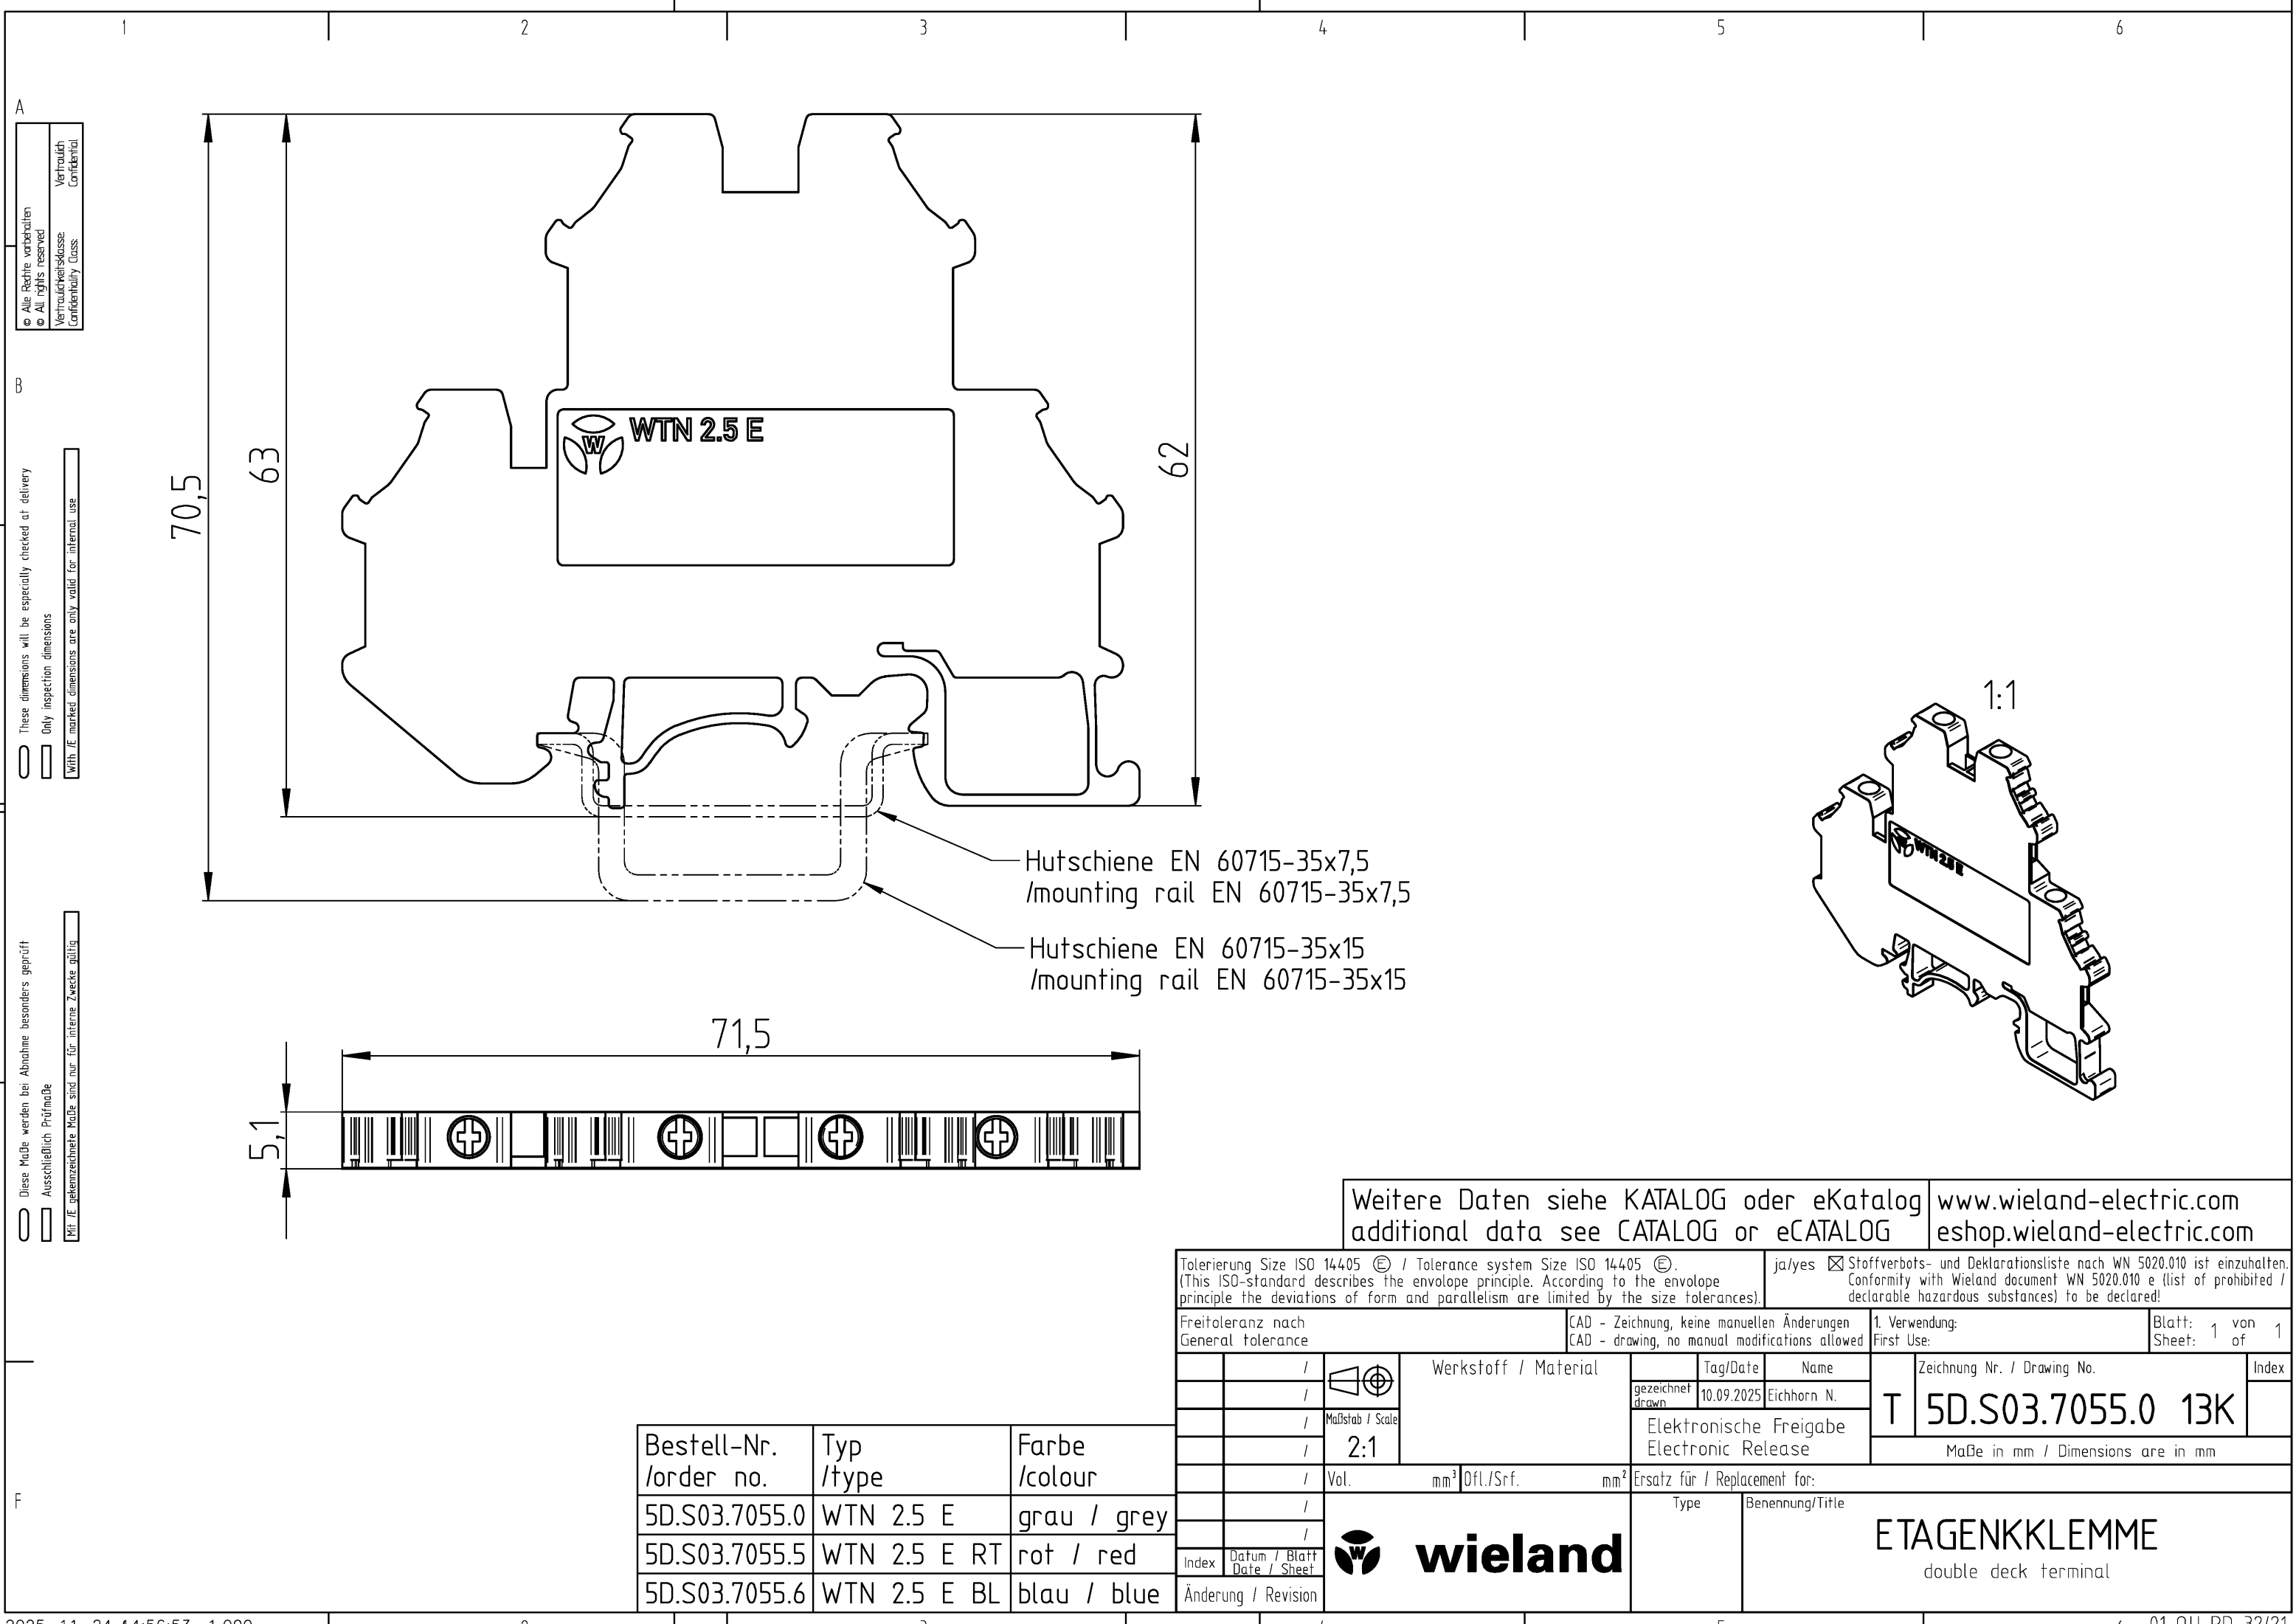

A
Alle Rechte vorbehalten
All rights reserved
Vertraulichkeitsklasse
Confidentiality Class
Vertraulich
Confidential

B
These dimensions will be especially checked at delivery
Only inspection dimensions
With /E marked dimensions are only valid for internal use

C
Diese Maße werden bei Abnahme besonders geprüft
Ausschließlich Prüfmaße
Mit /E gekennzeichnete Maße sind nur für interne Zwecke gültig

F

Weitere Daten siehe KATALOG oder eKatalog
additional data see CATALOG or eCATALOG
www.wieland-electric.com
eshop.wieland-electric.com

Tolerierung Size ISO 14405 © / Tolerance system Size ISO 14405 ©. (This ISO-standard describes the envelope principle. According to the envelope principle the deviations of form and parallelism are limited by the size tolerances).				ja/yes ☒ Stoffverbots- und Deklarationsliste nach WN 5020.010 ist einzuhalten. Conformity with Wieland document WN 5020.010 e (list of prohibited / declarable hazardous substances) to be declared!							
Freitoleranz nach General tolerance			CAD - Zeichnung, keine manuellen Änderungen CAD - drawing, no manual modifications allowed		1. Verwendung: First Use:		Blatt: Sheet: 1 von 1 of 1				
		Werkstoff / Material		Tag/Date		Name		Zeichnung Nr. / Drawing No.		Index	
				gezeichnet drawn 10.09.2025		Eichhorn N.					
		Maßstab / Scale		2:1		Elektronische Freigabe Electronic Release		Maße in mm / Dimensions are in mm			
		Vol.		mm ³ / OfL./Srf.		mm ²		Ersatz für / Replacement for:			
						Type		Benennung/Title			
								ETAGENKKLEMME			
								double deck terminal			
		Index		Datum / Blatt Date / Sheet							
		Änderung / Revision									

Bestell-Nr. /order no.	Typ /type	Farbe /colour
5D.S03.7055.0	WTN 2.5 E	grau / grey
5D.S03.7055.5	WTN 2.5 E RT	rot / red
5D.S03.7055.6	WTN 2.5 E BL	blau / blue