


Data sheet

Commercial Art.No.: 5D.S95.9055.0

earth terminal WTN 95 PE

earth terminal WTN 95 PE rated voltage 1000 V, screw connection, number of levels 1, number of clamp positions per level 3, nominal cross section 95 mm², connectable conductor cross section fine stranded without cable end sleeve 35mm² - 95mm², mounting method DIN rail (top hat rail), color green/yellow, width/grid dimension 25 mm, inflammability class of insulation material acc. with ul94 V0

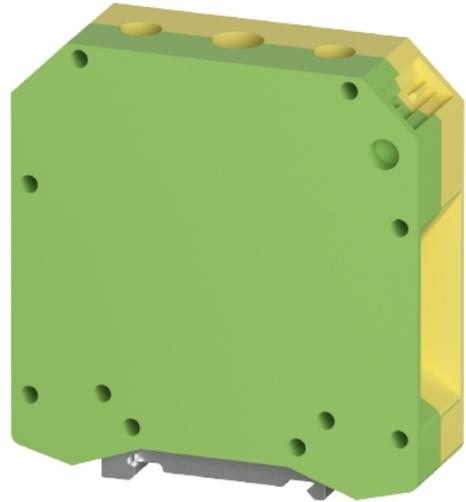

Commercial Art.No.	5D.S95.9055.0
EAN	4049088725715
Order Unit	10

certificates / approvals



LR

Technical data

general

nominal cross section	95 mm ²
color	green/yellow
number of levels	1
number of clamp positions per level	3
width/grid dimension	25 mm
insulating housing	PA
inflammability class of insulation material acc. with UL94	V0
mounting method	DIN rail (top hat rail)
Anschlussart	screw connection
Anzahl der Klemmstellen je Etage	3
Montageart	DIN rail (top hat rail)
Brennbarkeitsklasse des Isolierstoffs	V0

technical data

rated voltage	1000 V
rated impulse voltage	8 kV
closing plate required	no
length	90.5 mm
width	25 mm
height	50.1 mm

connection data

connection type	screw connection
-----------------	------------------

connection type 1	screw connection
minimum cross section solid	35 mm ²
maximum cross section solid	95 mm ²
minimum cross section fine stranded	35 mm ²
maximum cross section fine stranded	95 mm ²
mininum conductor cross section (flex., stranded) with cable end sleeve	35 mm ²
maximum conductor cross section (flex., stranded) with cable end sleeve	95 mm ²
wire strip length	25 mm
torque conductor mounting	17.9 Nm

technical data UL/CSA

cross section UL	2-4/0 AWG
voltage UL	600 V
cross section CSA	2-4/0 AWG
voltage CSA	600 V

classification

ETIM 9.0	EC000901
----------	----------

product compliance

REACH-SVHC conformity status	compliant
------------------------------	-----------

Accessories


Commercial Art.No.:	Article-type description:	Description:
0D.202.7281.0	marking strips WML 9.8/60	marking strips WML 9.8/60 material plastic, color white, length 230 mm, height 15.1 mm, inflammability class of insulation material acc. with ul94 V0
0D.210.7056.0	marking plate WMP 10-10	marking plate WMP 10-10 modular spacing 10 mm, material plastic, color white, length 128 mm, height 76 mm, inflammability class of insulation material acc. with ul94 V0

A
 © Alle Rechte vorbehalten
 © All rights reserved
 Vertraulichkeitsklasse
 Confidentiality Class: Vertraulich
 Confidential



B
 These dimensions will be especially checked at delivery
 Only inspection dimensions
 With /E marked dimensions are only valid for internal use

C
 Diese Maße werden bei Abnahme besonders geprüft
 Ausschließlich Prüfmaße
 Mit /E gekennzeichnete Maße sind nur für interne Zwecke gültig

F

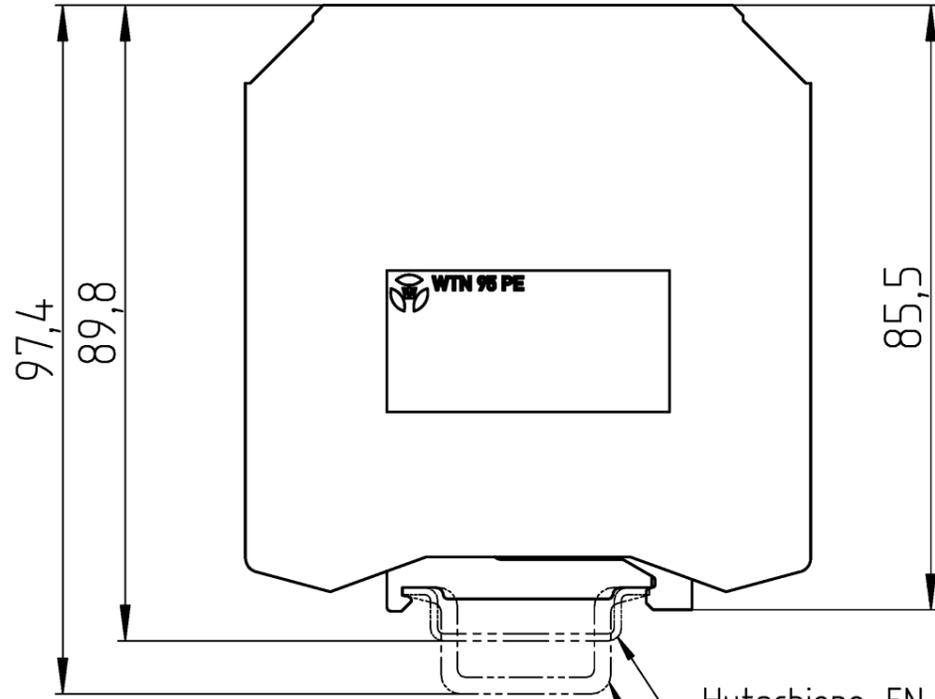

Hutschiene EN 60715-35x7,5
 /mounting rail EN 60715-35x7,5
 Hutschiene EN 60715-35x15
 /mounting rail EN 60715-35x15

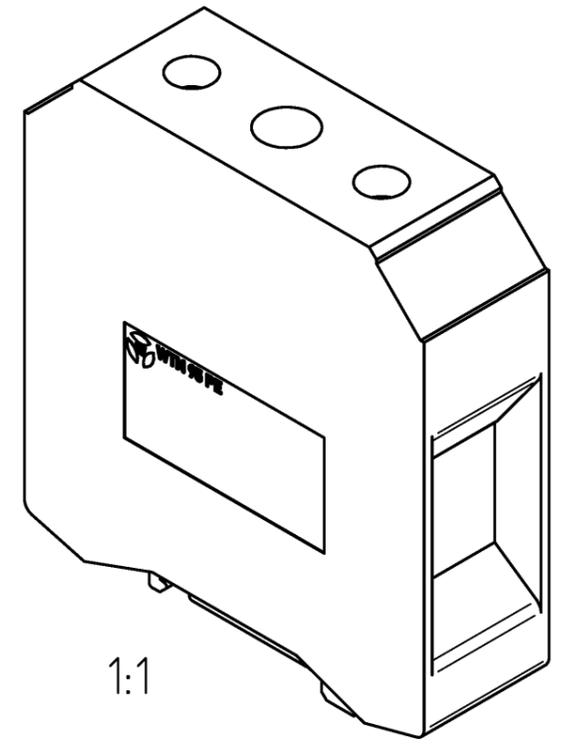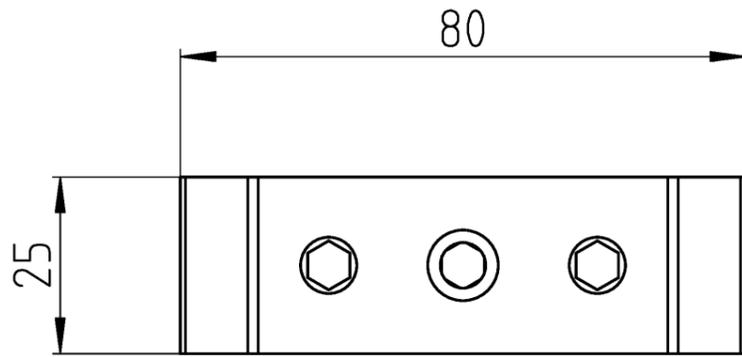

Weitere Daten siehe KATALOG oder eKatalog
 additional data see CATALOG or eCATALOG
www.wieland-electric.com
eshop.wieland-electric.com

Tolerierung Size ISO 14405 © / Tolerance system Size ISO 14405 ©. (This ISO-standard describes the envelope principle. According to the envelope principle the deviations of form and parallelism are limited by the size tolerances).		ja/yes <input checked="" type="checkbox"/> Stoffverbots- und Deklarationsliste nach WN 5020.010 ist einzuhalten. Conformity with Wieland document WN 5020.010 e (list of prohibited / declarable hazardous substances) to be declared!	
Freitoleranz nach General tolerance		CAD - Zeichnung, keine manuellen Änderungen CAD - drawing, no manual modifications allowed	
1. Verwendung: First Use:		Blatt: 1 von 1 Sheet: 1 of 1	
Werkstoff / Material		Tag/Date	Name
Maßstab / Scale		gezeichnet drawn	24.10.2025 Burger
1:1		Elektronische Freigabe Electronic Release	
Vol. mm ³ / Of./Srf. mm ²		Ersatz für / Replacement for:	
Index		Benennung/Title	
Datum / Blatt Date / Sheet		Type	
Änderung / Revision		SCHUTZLEITERKLEMME earth terminal	

Bestell-Nr. /order no.	Typ /type	Farbe /colour
5D.S95.9055.0	WTN 95 PE	grün-gelb /green-yellow

