


15990502

2nd auxiliary contact pre-break NO/NC ATyS 125-630A customer fit

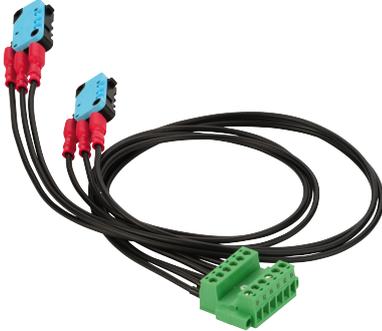

General characteristics

- Possibility to install up to 2 auxiliary contacts for each position.
- Suitable for use as a 1st or 2nd auxiliary contact.
- Low level AC: contact us.
- As standard, 1 NO auxiliary contact is provided for all three positions.

Access to resources (ex: manuals)



<https://www.socomec.co.uk/en-gb/reference/15990502>

Pre-break and signalling of positions I and II: each reference provides 1 NO/NC auxiliary contact for positions I and II.

Technical Characteristics

Weight [kg]	0.12
Number change-over contacts	1
Number NC contacts	1
Number NO contacts	1
Type	2nd Auxiliary contact 125A-630A customer fit

Classification

UNSPSC	39122205
ETIM Class	EC000041
IGCC	5177

Commerce

Effective date	2005-09-26
Offer Life Cycle Code	40
Country of origin	TN

ETIM - Electrical characteristics

Number of contacts as change-over contact	1
Rated operation current Ie at AC-15, 230 V [A]	10

ETIM - Mechanical characteristics

Type of electric connection	Screw connection
Mounting method	Front fastening

ETIM - Technical features

Model	Integrable
-------	------------

Logistics

GTIN/EAN	3596031801350
Customs number	8536500700
Price unit	PC
Weight of the packing unit [kg]	0.12
Length of the packing unit [m]	0.1
Width of the packing unit [m]	0.1
Depth of the packing unit [m]	0.05