

# Product datasheet

Specifications



## TeSys D reversing contactor - 3P(3 NO) - AC-3 - $\leq 440$ V 18 A - 230 V AC coil

Local distributor code:

381823171

LC2D18P7

EAN Code: 3389110386639

## Main

Range	TeSys TeSys Deca
Product name	TeSys D TeSys Deca
Product or component type	Reversing contactor
Device short name	LC2D
Contactor application	Resistive load Motor control
Utilisation category	AC-3 AC-1 AC-3e
Device presentation	Preassembled with reversing power busbar
Poles description	3P
power pole contact composition	3 NO
[Ue] rated operational voltage	Power circuit: $\leq 690$ V AC 25...400 Hz Power circuit: $\leq 300$ V DC
[Ie] rated operational current	18 A (at $<60$ °C) at $\leq 440$ V AC AC-3 for power circuit 32 A (at $<60$ °C) at $\leq 440$ V AC AC-1 for power circuit 18 A (at $<60$ °C) at $\leq 440$ V AC AC-3e for power circuit
Motor power kW	4 kW at 220...230 V AC 50...60 Hz 7.5 kW at 380...400 V AC 50...60 Hz 9 kW at 415 V AC 50...60 Hz 9 kW at 440 V AC 50...60 Hz 10 kW at 500 V AC 50...60 Hz 10 kW at 660...690 V AC 50...60 Hz
Motor power hp	1 hp at 115 V AC 60 Hz for 1 phase motors 3 hp at 230/240 V AC 60 Hz for 1 phase motors 5 hp at 200/208 V AC 60 Hz for 3 phases motors 5 hp at 230/240 V AC 60 Hz for 3 phases motors 10 hp at 460/480 V AC 60 Hz for 3 phases motors 15 hp at 575/600 V AC 60 Hz for 3 phases motors
Control circuit type	AC at 50/60 Hz
[Uc] control circuit voltage	230 V AC 50/60 Hz
Auxiliary contact composition	1 NO + 1 NC
[Uimp] rated impulse withstand voltage	6 kV conforming to IEC 60947
Overtoltage category	III
[Ith] conventional free air thermal current	10 A (at 60 °C) for signalling circuit 32 A (at 60 °C) for power circuit
Irms rated making capacity	140 A AC for signalling circuit conforming to IEC 60947-5-1 250 A DC for signalling circuit conforming to IEC 60947-5-1 300 A at 440 V for power circuit conforming to IEC 60947

<b>Rated breaking capacity</b>	300 A at 440 V for power circuit conforming to IEC 60947
<b>[Icw] rated short-time withstand current</b>	40 A 40 °C - 10 min for power circuit 84 A 40 °C - 1 min for power circuit 145 A 40 °C - 10 s for power circuit 240 A 40 °C - 1 s for power circuit 100 A - 1 s for signalling circuit 120 A - 500 ms for signalling circuit 140 A - 100 ms for signalling circuit
<b>Associated fuse rating</b>	10 A gG for signalling circuit conforming to IEC 60947-5-1 50 A gG at <= 690 V coordination type 1 for power circuit 35 A gG at <= 690 V coordination type 2 for power circuit
<b>Average impedance</b>	2.5 mOhm - Ith 32 A 50 Hz for power circuit
<b>[UI] rated insulation voltage</b>	Power circuit: 690 V conforming to IEC 60947-4-1 Power circuit: 600 V CSA certified Power circuit: 600 V UL certified Signalling circuit: 690 V conforming to IEC 60947-1 Signalling circuit: 600 V CSA certified Signalling circuit: 600 V UL certified
<b>Electrical durability</b>	1.65 Mcycles 18 A AC-3 at Ue <= 440 V 1 Mcycles 32 A AC-1 at Ue <= 440 V 1.65 Mcycles 18 A AC-3e at Ue <= 440 V
<b>Power dissipation per pole</b>	0.8 W AC-3 2.5 W AC-1 0.8 W AC-3e
<b>Front cover</b>	With
<b>Interlocking type</b>	Mechanical
<b>Mounting support</b>	Plate Rail
<b>Standards</b>	CSA C22.2 No 14 EN 60947-4-1 EN 60947-5-1 IEC 60947-4-1 IEC 60947-5-1 UL 60335-2-40:Annex JJ IEC 60335-1
<b>Product certifications</b>	DNV CSA CCC UL GL LROS (Lloyds register of shipping) BV RINA GOST UKCA
<b>Connections - terminals</b>	Control circuit: screw clamp terminals 1 cable(s) 1...4 mm <sup>2</sup> flexible without cable end Control circuit: screw clamp terminals 2 cable(s) 1...4 mm <sup>2</sup> flexible without cable end Control circuit: screw clamp terminals 1 cable(s) 1...4 mm <sup>2</sup> flexible with cable end Control circuit: screw clamp terminals 2 cable(s) 1...2.5 mm <sup>2</sup> flexible with cable end Control circuit: screw clamp terminals 1 cable(s) 1...4 mm <sup>2</sup> solid Control circuit: screw clamp terminals 2 cable(s) 1...4 mm <sup>2</sup> solid Power circuit: screw clamp terminals 1 cable(s) 1.5...6 mm <sup>2</sup> flexible without cable end Power circuit: screw clamp terminals 2 cable(s) 1.5...6 mm <sup>2</sup> flexible without cable end Power circuit: screw clamp terminals 1 cable(s) 1...6 mm <sup>2</sup> flexible with cable end Power circuit: screw clamp terminals 2 cable(s) 1...4 mm <sup>2</sup> flexible with cable end Power circuit: screw clamp terminals 1 cable(s) 1.5...6 mm <sup>2</sup> solid Power circuit: screw clamp terminals 2 cable(s) 1.5...6 mm <sup>2</sup> solid
<b>Tightening torque</b>	Power circuit: 1.7 N.m - on screw clamp terminals - with screwdriver flat Ø 6 mm Power circuit: 1.7 N.m - on screw clamp terminals - with screwdriver Philips No 2 Control circuit: 1.7 N.m - on screw clamp terminals - with screwdriver flat Ø 6 mm Control circuit: 1.7 N.m - on screw clamp terminals - with screwdriver Philips No 2 Control circuit: 1.7 N.m - on screw clamp terminals - with screwdriver pozidriv No 2 Power circuit: 2.5 N.m - on screw clamp terminals - with screwdriver pozidriv No 2
<b>Operating time</b>	12...22 ms closing 4...19 ms opening

<b>Safety reliability level</b>	B10d = 1369863 cycles contactor with nominal load conforming to EN/ISO 13849-1 B10d = 20000000 cycles contactor with mechanical load conforming to EN/ISO 13849-1
<b>Mechanical durability</b>	15 Mcycles
<b>Maximum operating rate</b>	3600 cyc/h 60 °C

## Complementary

<b>Coil technology</b>	Without built-in suppressor module
<b>Control circuit voltage limits</b>	0.3...0.6 U <sub>c</sub> (-40...70 °C):drop-out AC 50/60 Hz 0.8...1.1 U <sub>c</sub> (-40...60 °C):operational AC 50 Hz 0.85...1.1 U <sub>c</sub> (-40...60 °C):operational AC 60 Hz 1...1.1 U <sub>c</sub> (60...70 °C):operational AC 50/60 Hz
<b>Inrush power in VA</b>	70 VA 60 Hz cos phi 0.75 (at 20 °C) 70 VA 50 Hz cos phi 0.75 (at 20 °C)
<b>Hold-in power consumption in VA</b>	7.5 VA 60 Hz cos phi 0.3 (at 20 °C) 7 VA 50 Hz cos phi 0.3 (at 20 °C)
<b>Heat dissipation</b>	2...3 W at 50/60 Hz
<b>Auxiliary contacts type</b>	type mechanically linked 1 NO + 1 NC conforming to IEC 60947-5-1 type mirror contact 1 NC conforming to IEC 60947-4-1
<b>Signalling circuit frequency</b>	25...400 Hz
<b>Minimum switching current</b>	5 mA for signalling circuit
<b>Minimum switching voltage</b>	17 V for signalling circuit
<b>Non-overlap time</b>	1.5 ms on de-energisation between NC and NO contact 1.5 ms on energisation between NC and NO contact
<b>Insulation resistance</b>	> 10 MOhm for signalling circuit

## Environment

<b>IP degree of protection</b>	IP20 front face conforming to IEC 60529
<b>Climatic withstand</b>	conforming to IACS E10 conforming to IEC 60947-1 Annex Q category D
<b>Protective treatment</b>	TH conforming to IEC 60068-2-30
<b>Pollution degree</b>	3
<b>Ambient air temperature for operation</b>	-40...60 °C 60...70 °C with derating
<b>Ambient air temperature for storage</b>	-60...80 °C
<b>Operating altitude</b>	0...3000 m
<b>Fire resistance</b>	850 °C conforming to IEC 60695-2-1
<b>Flame retardance</b>	V1 conforming to UL 94
<b>Mechanical robustness</b>	Vibrations contactor open: 2 Gn, 5...300 Hz Vibrations contactor closed: 4 Gn, 5...300 Hz Shocks contactor open: 10 Gn for 11 ms Shocks contactor closed: 15 Gn for 11 ms
<b>Height</b>	77 mm
<b>Width</b>	90 mm
<b>Depth</b>	86 mm
<b>Product weight</b>	0.707 kg

## Packing Units

<b>Unit Type of Package 1</b>	PCE
<b>Number of Units in Package 1</b>	1
<b>Package 1 Height</b>	9.300 cm
<b>Package 1 Width</b>	11.500 cm
<b>Package 1 Length</b>	14.000 cm
<b>Package 1 Weight</b>	804.000 g
<b>Unit Type of Package 2</b>	S02
<b>Number of Units in Package 2</b>	6
<b>Package 2 Height</b>	15.000 cm
<b>Package 2 Width</b>	30.000 cm
<b>Package 2 Length</b>	40.000 cm
<b>Package 2 Weight</b>	5.150 kg
<b>Unit Type of Package 3</b>	P06
<b>Number of Units in Package 3</b>	96
<b>Package 3 Height</b>	75.000 cm
<b>Package 3 Width</b>	60.000 cm
<b>Package 3 Length</b>	80.000 cm
<b>Package 3 Weight</b>	90.400 kg

## Logistical informations

<b>Country of origin</b>	FR
--------------------------	----

## Contractual warranty

<b>Warranty (in months)</b>	18
-----------------------------	----



## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



### Environmental footprint

Total lifecycle Carbon footprint	52 kg CO2 eq.
Carbon footprint of the manufacturing phase [A1 to A3]	3 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	0.3 kg CO2 eq.
Carbon footprint of the installation phase [A5]	0.1 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	49 kg CO2 eq.
Environmental Disclosure	<a href="#">Product Environmental Profile</a>

## Use Better



### Materials and Substances

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
EU RoHS Directive	<a href="#">Compliant</a>
REACH Regulation	<a href="#">Free of Substances of Very High Concern above the threshold</a>
PVC free	Yes

## Use Longer



### Lifetime extension

Repair	No
--------	----

## Use Again




### Repack and remanufacture

Recyclability potential, in %	66
End of life manual availability	<a href="#">End of Life Information</a>
Take-back	Nej
WEEE Label	 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Dimensions Drawings

Dimensions

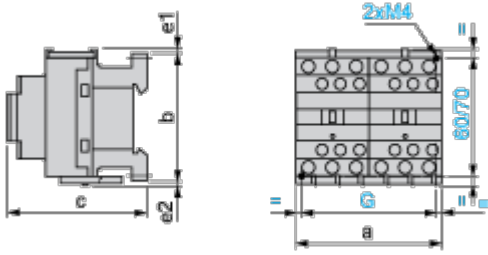


LC2 or 2 x LC1	a	b	c <sup>(1)</sup>	e1	e2	G
D09 to D18 (AC)	90	77	86	4	1.5	80
D093 to D123 (AC)	90	99	86	–	–	80
D09 to D18 (DC)	90	77	95	4	1.5	80
D093 to D123 (DC)	90	99	95	–	–	80
D25 to D38 (AC)	90	85	92	9	5	80
D183 to D383 (AC)	90	99	92	–	–	80
D25 to D32 (DC)	90	85	101	9	5	80
D183 to D383 (DC)	90	99	101	–	–	80
e1 and e2: including cabling.						
(1) With safety cover, without add-on block.						

Connections and Schema

Wiring

---

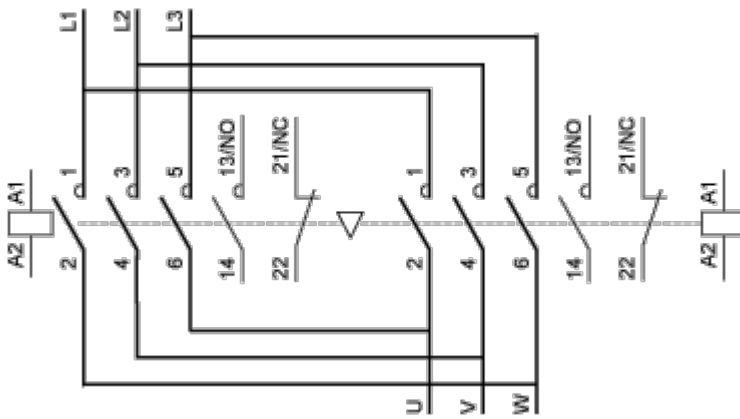

Technical Illustration

Assembly's dimensions

---

mm  
[in]

