

## 1 & 2 Pole DIN Mount Relay Sockets



## D Series Relay

- For D1 & D2 plug in power relay
- 35mm DIN rail mount
- Ejector clips available
- CE & UKCA approved

Socket Characteristics	
Ambient Temperature	-40°C to +70°C
Voltage Rating	250VAC
Current Rating	10A Per Pole
DIN Protection Rating	IP20
Construction Material	PA66+GF V0 (UL)
Terminal Torque	0.6N.m
Wire Strip Length	7mm
Relay Application	D1 & D2
Dielectric Strength	2000VAC

Base Part Number	Description
<b>157FF-1Z-C3</b>	1 Pole 5 Pin DIN Socket for D1 Relay
<b>157FF-2Z-C3</b>	2 Pole 8 Pin DIN Socket for D2 Relay
<b>157F-ERC</b>	Plastic Ejector Clip for D1 & D2 Relay
<b>14F-MARKING TAG</b>	Marking Tag for 157FF Sockets

**157FF-1Z-C3**

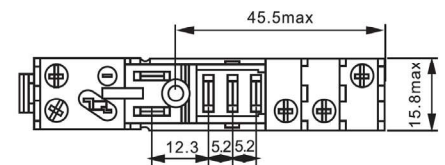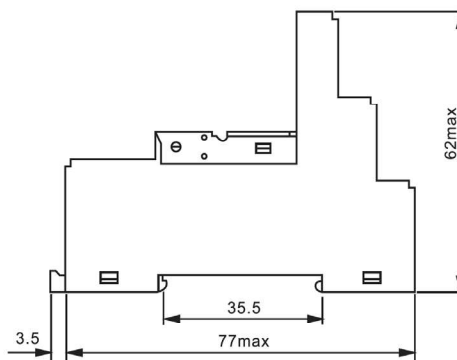

**157FF-2Z-C3**

