

Data sheet

Commercial Art.No.: 0D.203.3327.5

jumper bar IVB WTPN 2,5-3

jumper bar IVB WTPN 2,5-3 modular spacing 5.1 mm, insulated yes, number of poles 3, color red, height 23 mm, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0



Commercial Art.No.	0D.203.3327.5
EAN	4049088729829
Order Unit	200

Technical data

general

color	red
inflammability class of insulation material acc. with UL94	V0
width/grid dimension	13.9 mm
length	3 mm
modular spacing	5.1 mm
number of bridged clamps	3
mounting method	pluggable
insulated	yes
model	cross connector
height	23 mm

classification

ETIM 9.0	EC000489
----------	----------




product compliance

ROHS conformity status	compliant
REACH-SVHC conformity status	compliant

A
 © Alle Rechte vorbehalten
 © All rights reserved
 Vertraulich
 Confidentially Class.

B
 These dimensions will be especially checked at delivery
 Only inspection dimensions
 With /E marked dimensions are only valid for internal use

C
 Diese Maße werden bei Abnahme besonders geprüft
 Ausschließlich Prüfmaße
 Mit /E gekennzeichnete Maße sind nur für interne Zwecke gültig

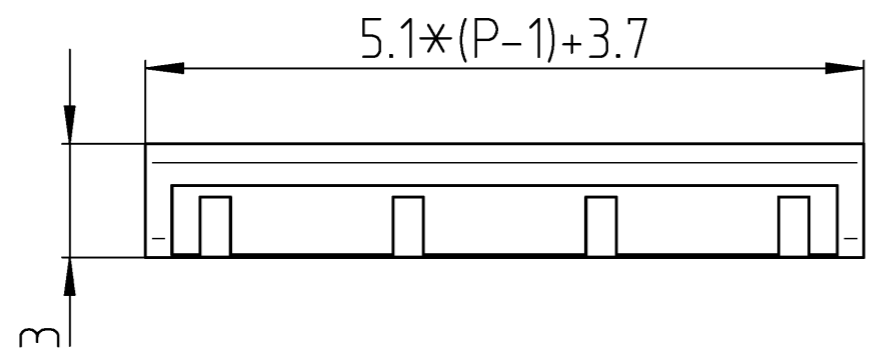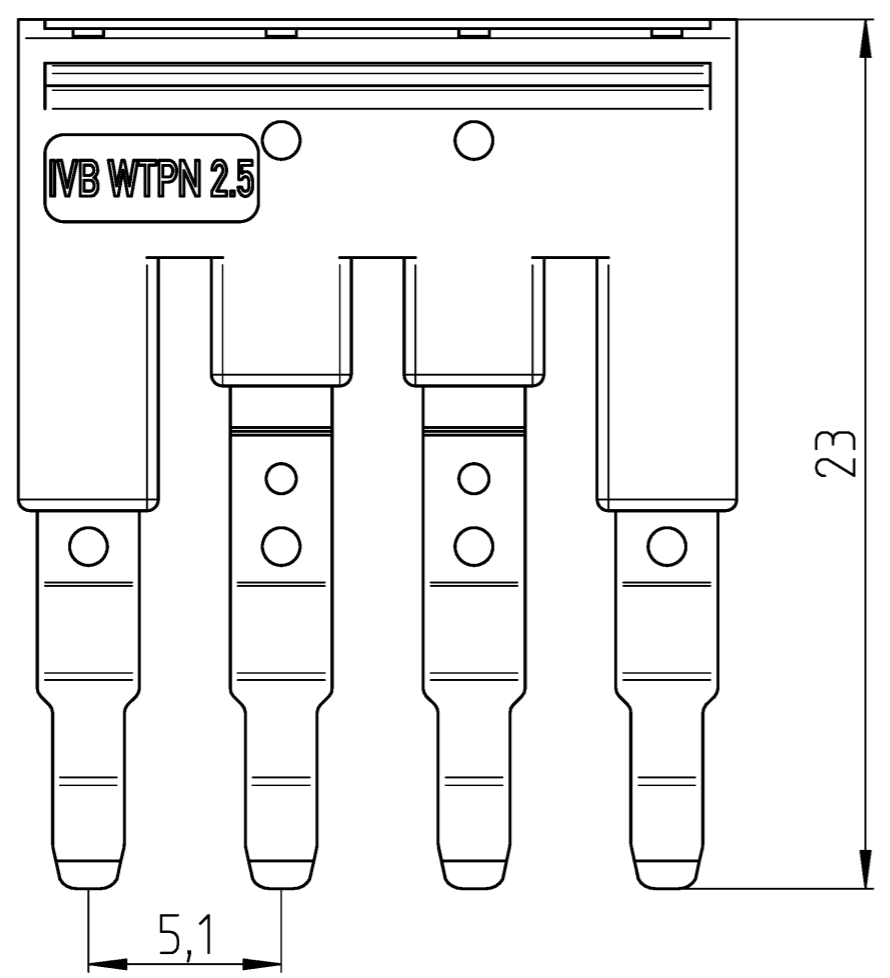

1:1

Weitere Daten siehe KATALOG oder eKatalog
 additional data see CATALOG or eCATALOG
www.wieland-electric.com
eshop.wieland-electric.com

Tolerierung Size ISO 14405 (E) / Tolerance system Size ISO 14405 (E).
 (This ISO-standard describes the envelope principle. According to the envelope principle the deviations of form and parallelism are limited by the size tolerances).
 ja/yes Stoffverbots- und Deklarationsliste nach WN 5020.010 ist einzuhalten.
 Conformity with Wieland document WN 5020.010 e (list of prohibited / declarable hazardous substances) to be declared!

Bestell-Nr. /order no.	Polzahl P /number of poles P	Typ /type	Farbe /colour	VPE: packaging unit:
0D.203.3227.5	2	IVB WTPN 2.5-2	rot / red	2P: 250 3P & 4P: 200 5P, 10P, 20P: 100
0D.203.3327.5	3	IVB WTPN 2.5-3	rot / red	
0D.203.3427.5	4	IVB WTPN 2.5-4	rot / red	
0D.203.3527.5	5	IVB WTPN 2.5-5	rot / red	
0D.203.4027.5	10	IVB WTPN 2.5-10	rot / red	
0D.203.5027.5	20	IVB WTPN 2.5-20	rot / red	

Freitoleranz nach General tolerance		CAD - Zeichnung, keine manuellen Änderungen CAD - drawing, no manual modifications allowed		1. Verwendung: First Use:		Blatt: Sheet: 1 von 1 of 1	
Werkstoff / Material		Tag/Date	Name		Zeichnung Nr. / Drawing No.		
Maßstab / Scale		gezeichnet drawn	Eichhorn N.		Index		
5:1		Elektronische Freigabe Electronic Release		T 0D.203.3227.5 13K			
Vol. mm ³ / fl./Srf. mm ²		Ersatz für / Replacement for:					
Index		Datum / Blatt Date / Sheet		Type		Benennung/Title	
Änderung / Revision		wieland		VERBINDUNGSSTECKER connection plug			