


Data sheet

Commercial Art.No.: 5D.S95.0055.6

feed-through terminal WTN 95 BL

feed-through terminal WTN 95 BL rated voltage 1000 V, rated current 232 A, screw connection, number of levels 1, number of clamp positions per level 2, nominal cross section 95 mm², connectable conductor cross section fine stranded without cable end sleeve 35mm² - 95mm², mounting method DIN rail (top hat rail), color blue, width/grid dimension 32.2 mm, inflammability class of insulation material acc. with ul94 V0

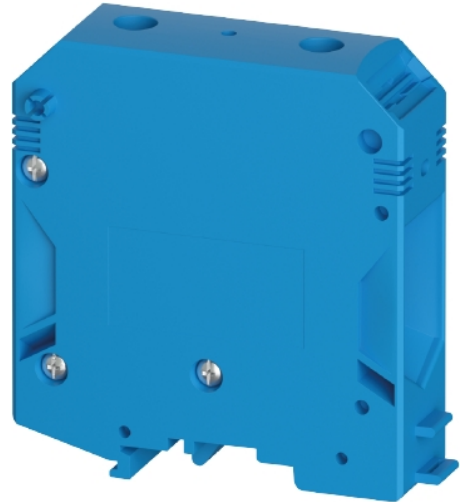

Commercial Art.No.	5D.S95.0055.6
EAN	4049088725685
Order Unit	20

certificates / approvals



LR

Technical data

general

nominal cross section	95 mm ²
color	blue
number of levels	1
number of clamp positions per level	2
width/grid dimension	32.2 mm
insulating housing	PA
inflammability class of insulation material acc. with UL94	V0
mounting method	DIN rail (top hat rail)
Anschlussart	screw connection
Anzahl der Klemmstellen je Etage	2
Montageart	DIN rail (top hat rail)
Brennbarkeitsklasse des Isolierstoffs	V0
halogen free	yes

technical data

rated current	232 A
rated voltage	1000 V
rated impulse voltage	8 kV
pollution degree	3
closing plate required	no
length	80 mm
width	25 mm

height	89.4 mm
--------	---------

connection data

connection type	screw connection
connection type 1	screw connection
minimum cross section solid	35 mm ²
maximum cross section solid	95 mm ²
minimum cross section fine stranded	35 mm ²
maximum cross section fine stranded	95 mm ²
minumum conductor cross section (flex., stranded) with cable end sleeve	35 mm ²
maximum conductor cross section (flex., stranded) with cable end sleeve	95 mm ²
wire strip length	26 mm
torque conductor mounting	10 Nm

technical data UL/CSA

cross section UL	2-4/0 AWG
voltage UL	600 V
current factory wiring	230 A
current field wiring	230 A
cross section CSA	2-4/0 AWG
voltage CSA	600 V
current CSA	230 A

classification

ETIM 9.0	EC000897
----------	----------

product compliance

REACH-SVHC conformity status	compliant
------------------------------	-----------

Accessories


Commercial Art.No.:	Article-type description:	Description:
0D.S95.3227.0	insert bridge IVB WTN 95-2 IN	insert bridge IVB WTN 95-2 IN modular spacing 25 mm, insulated yes, number of poles 2, color grey, height 34.2 mm, mounting method screwable, inflammability class of insulation material acc. with ul94 V0
0D.S95.3327.0	insert bridge IVB WTN 95-3 IN	insert bridge IVB WTN 95-3 IN modular spacing 25 mm, insulated yes, number of poles 3, color grey, height 34.2 mm, mounting method screwable, inflammability class of insulation material acc. with ul94 V0
0D.202.7281.0	marking strips WML 9.8/60	marking strips WML 9.8/60 material plastic, color white, length 230 mm, height 15.1 mm, inflammability class of insulation material acc. with ul94 V0
0D.210.7056.0	marking plate WMP 10-10	marking plate WMP 10-10 modular spacing 10 mm, material plastic, color white, length 128 mm, height 76 mm, inflammability class of insulation material acc. with ul94 V0

A
Alle Rechte vorbehalten
All rights reserved
Vertraulichkeitsklasse
Confidentiality Class: Vertraulich
Confidential



B
These dimensions will be especially checked at delivery
Only inspection dimensions
With /E marked dimensions are only valid for internal use

C
Diese Maße werden bei Abnahme besonders geprüft
Ausschließlich Prüfmaße
Mit /E gekennzeichnete Maße sind nur für interne Zwecke gültig

F

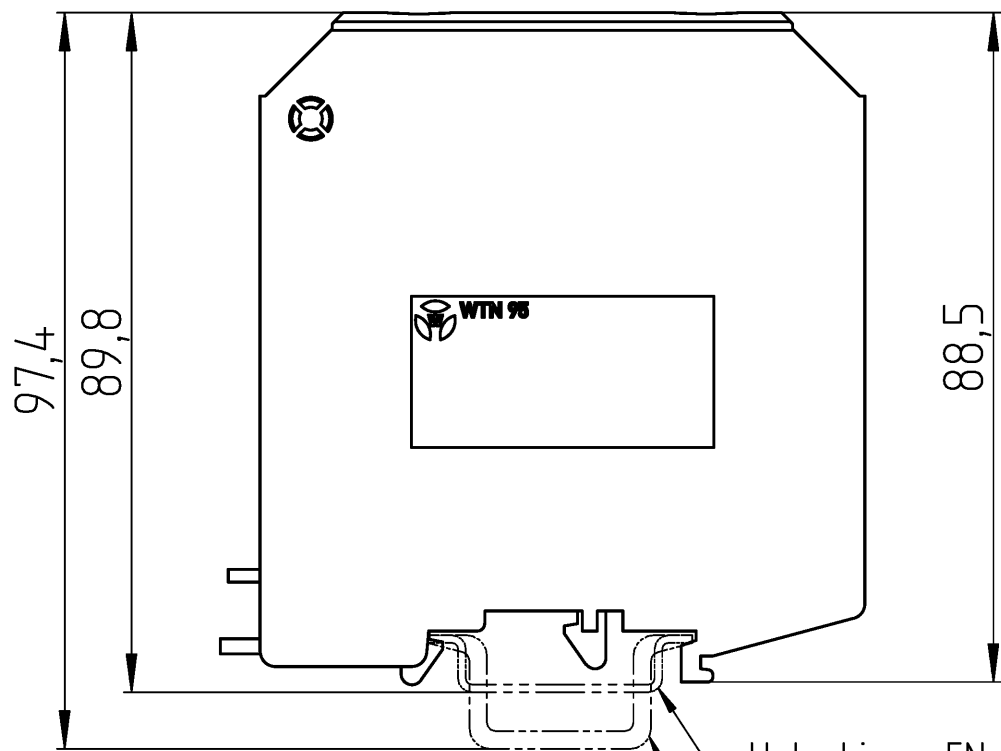

Hutschiene EN 60715-35x7,5
/mounting rail EN 60715-35x7,5
Hutschiene EN 60715-35x15
/mounting rail EN 60715-35x15

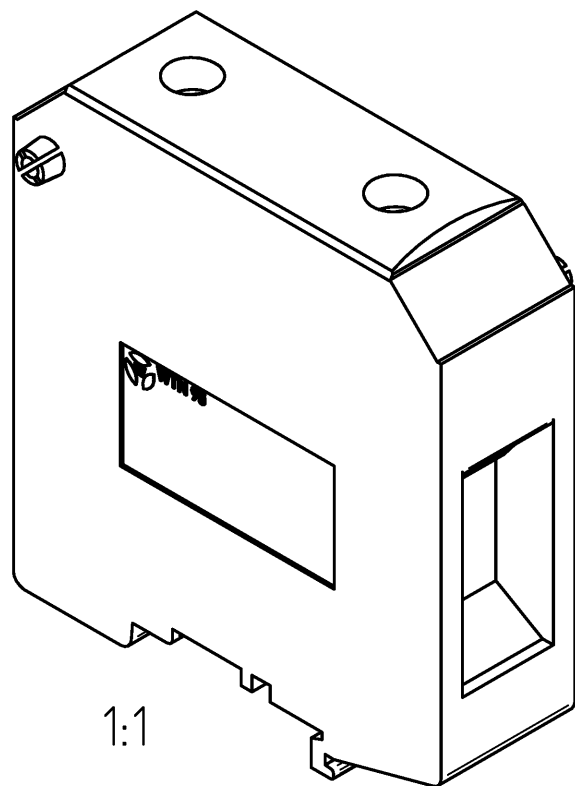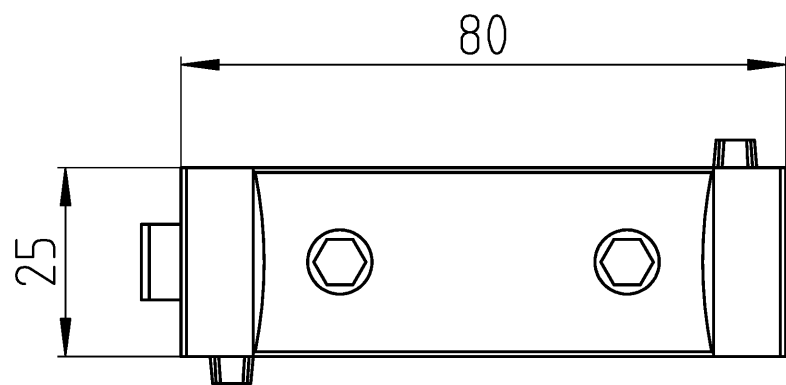

Weitere Daten siehe KATALOG oder eKatalog
additional data see CATALOG or eCATALOG
www.wieland-electric.com
eshop.wieland-electric.com

Tolerierung Size ISO 14405 © / Tolerance system Size ISO 14405 ©. (This ISO-standard describes the envelope principle. According to the envelope principle the deviations of form and parallelism are limited by the size tolerances).				ja/yes ☒ Stoffverbots- und Deklarationsliste nach WN 5020.010 ist einzuhalten. Conformity with Wieland document WN 5020.010 e (list of prohibited / declarable hazardous substances) to be declared!							
Freitoleranz nach General tolerance			CAD - Zeichnung, keine manuellen Änderungen CAD - drawing, no manual modifications allowed		1. Verwendung: First Use:		Blatt: Sheet: 1 von 1 of 1				
		Werkstoff / Material		Tag/Date		Name		Zeichnung Nr. / Drawing No.		Index	
				gezeichnet drawn 24.10.2025		Burger					
		Maßstab / Scale 1:1		Elektronische Freigabe Electronic Release				T 5D.S95.0055.0 13K			
				Vol. mm³ Dfl./Srf. mm²				Ersatz für / Replacement for:			
		wieland		Type		Benennung/Title DURCHGANGSKLEMME feed-through terminal					
				Index Datum / Blatt Date / Sheet		Änderung / Revision					

Bestell-Nr. /order no.	Typ /type	Farbe /colour
5D.S95.0055.0	WTN 95	grau/grey
5D.S95.0055.5	WTN 95 RT	rot/red
5D.S95.0055.6	WTN 95 BL	blau/blue