


823 CUR/P

Plastic Consumer Unit Relocation

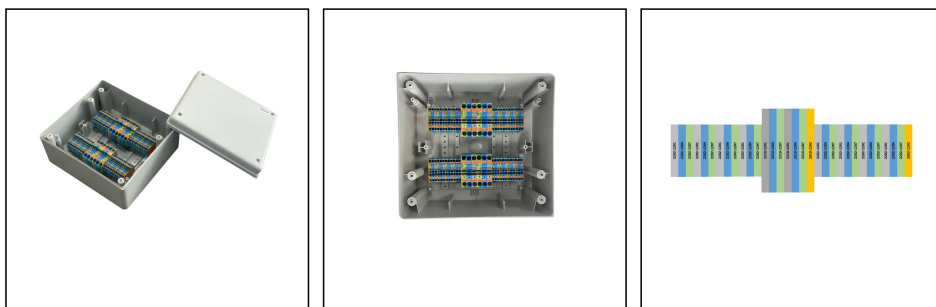

Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

Material	Polycarbonate
Protection class	IP65
Temp. range min	-25 °C
Temp. range max	85 °C
Glow wire test	650 °C
Impact resistance	IK08
External dimensions LxWxH	270x250x160mm
Type	823 CUR/P
UK-Number	823 CUR/P
Product Color	RAL 7035
WISKA-Order no.	10112389
Packing unit	1

Description:

Suitable for relocating up to 20 ways*

Fast self-tapping stainless screws

Terminals**

- 2202-1201 - Grey 2 conductor DIN-rail terminal with button push-in up to 4mm (x16)
- 2202-1204 - Blue 2 conductor DIN-rail terminal with button push-in up to 4mm (x16)
- 2202-1207 - Green/Yellow 2 conductor DIN-rail terminal with button push-in up to 4mm (x16)
- 2002-1292 - Orange Endplate for 2202 (x2)
- 2210-1201 - Grey 2 conductor DIN-rail terminal with button push-in up to 16mm (x4)
- 2210-1204 - Blue 2 conductor DIN-rail terminal with button push-in up to 16mm (x4)
- 2210-1207 - Green/Yellow 2 conductor DIN-rail terminal with button push-in up to 16mm (x4)
- 2010-1292 - Orange Endplate for 2210 (x2)

Your Contact:

WISKA UK Ltd.

Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain

☎ +44-12-08816062 · 📠 +44-12-08816708

info@wiska.co.uk · www.wiska.co.uk

***Each Final ring circuit need to be considered as 2 ways**

****We reserve the right to use alternative push-in terminals to the same standard should there be supply issues.**

10.08.2026

Your Contact:

WISKA UK Ltd.

Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain

 +44-12-08816062 ·  +44-12-08816708

info@wiska.co.uk · www.wiska.co.uk

Other technical data on request / subject to change without notice