


Data sheet

Commercial Art.No.: 5D.204.4455.0

fuse terminal WTPN 4 FSIL 5X20

fuse terminal WTPN 4 FSIL 5X20 rated voltage 500 V, rated current 6.3 A, push-In connection//true, number of levels 1, number of clamp positions per level 2, nominal cross section 4 mm², connectable conductor cross section fine stranded without cable end sleeve 0,2mm² - 4mm², mounting method DIN rail (top hat rail), color black, width/grid dimension 8 mm, inflammability class of insulation material acc. with ul94 V0, terminal blocks for electrical installations yes

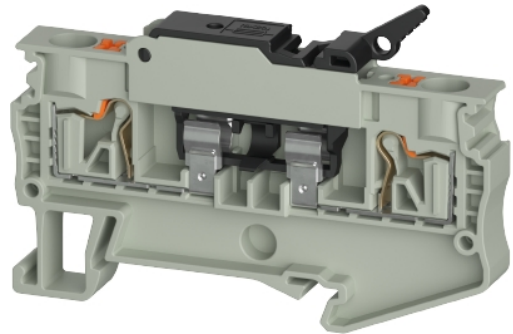

Commercial Art.No.	5D.204.4455.0
EAN	4049088718991
Order Unit	50

certificates / approvals



Technical data

general

nominal cross section	4 mm ²
color	black
number of levels	1
number of clamp positions per level	2
width/grid dimension	8 mm
insulating housing	PA
inflammability class of insulation material acc. with UL94	V0
mounting method	DIN rail (top hat rail)
terminal blocks for electrical installations	yes
connection type	push-In connection//true
number of clamp positions per level	2
mounting method	DIN rail (top hat rail)
inflammability class of insulation material acc. with UL94	V0
terminal blocks for electrical installations	yes
halogen free	yes

technical data

rated current	6.3 A
rated voltage	500 V
rated impulse voltage	6 kV
pollution degree	3
closing plate required	yes
type of insulation material	thermoplastic
length	67.3 mm
width	8 mm
height	45.7 mm

connection data

connection type	push-In connection//true
connection type 1	plug-in connection
minimum cross section solid	0.2 mm ²
maximum cross section solid	4 mm ²
minimum cross section fine stranded	0.2 mm ²
maximum cross section fine stranded	4 mm ²
minumum conductor cross section (flex., stranded) with cable end sleeve	0.25 mm ²
maximum conductor cross section (flex., stranded) with cable end sleeve	4 mm ²
wire strip length	12 mm

technical data UL/CSA

cross section UL	24-10 AWG
voltage UL	300 V
current factory wiring	6.3 A
current field wiring	6.3 A
cross section CSA	24-10 AWG
voltage CSA	300 V
current CSA	6.3 A

classification


ETIM 9.0	EC000899
----------	----------

product compliance

ROHS conformity status	compliant
REACH-SVHC conformity status	compliant

Accessories

Commercial Art.No.:	Article-type description:	Description:
0D.204.8800.0	fuse WF 5X20 1A	fuse WF 5X20 1A length 20 mm, height 5.2 mm, color transparent
0D.204.8900.0	fuse WF 5X20 2A	fuse WF 5X20 2A length 20 mm, height 5.2 mm, color transparent
0D.204.9000.0	fuse WF 5X20 6.3A	fuse WF 5X20 6.3A length 20 mm, height 5.2 mm, color transparent
0D.202.7381.0	marking strips WML 7.4/60	marking strips WML 7.4/60 material plastic, color white, length 230 mm, height 11.4 mm, inflammability class of insulation material acc. with ul94 V0
0D.206.7156.0	marking plate WMP 8-5.8	marking plate WMP 8-5.8 modular spacing 8 mm, material plastic, color white, length 128 mm, height 76 mm, inflammability class of insulation material acc. with ul94 V0

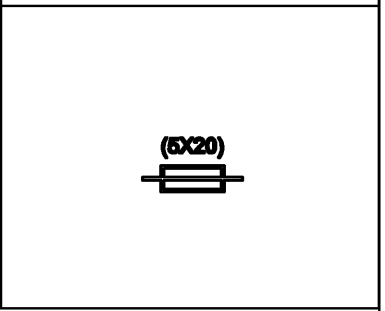

☐ Diese Maße werden bei Abnahme besonders geprüft

☐ Ausschließlich Prüfmäße

☐ Mit JE gekennzeichnete Maße sind nur für interne Zwecke gültig

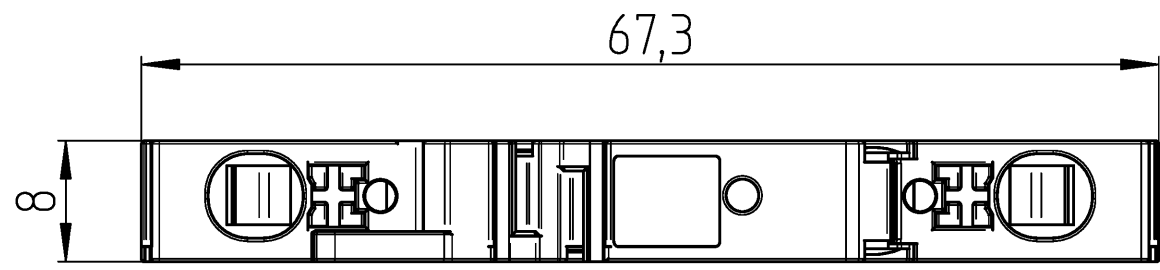


Diagram 1:1 illustrates the connection of the cable to the network switch. The cable is plugged into the RJ45 port on the side of the switch. The switch is shown in a perspective view, with the RJ45 port clearly visible. The cable is connected to the port, and the switch is shown in a perspective view.

Tolerieranz Size ISO 14405 © / Tolerance system Size ISO 14405 ©. (This ISO-standard describes the envelope principle. According to the envelope principle the deviations of form and parallelism are limited by the size tolerances).					ja/yes ☒ Stoffverbots- und Deklarationsliste nach WN 5020.010 ist eingehalten. Conformity with Wieland document WN 5020.010 e (list of prohibited / declarable hazardous substances) to be declared!					
Freitoleranz nach General tolerance			CAD - Zeichnung, keine manuellen Änderungen CAD - drawing, no manual modifications allowed			1. Verwendung: First Use:		Blatt: 1 von 1 Sheet: 1 of 1		
	/		Werkstoff / Material			Tag/Date	Name	Zeichnung Nr. / Drawing No. 5D.204.4455.0 13K		Index
	/				gezeichnet drawn	09.05.2025	Hollet			
	/				Elektronische Freigabe Electronic Release					
	/									
	/	Maßstab / Scale			Maße in mm / Dimensions are in mm					
	/	2:1								
	/	Vol.	mm ³	Dfl./Srf.	mm ²	Ersatz für / Replacement for:				
	/				Type	Benennung/Title				
	/					SICHERUNGSKLEMME				
Index	Datum / Blatt Date / Sheet		wieland		fuse terminal					
Änderung / Revision										

Bestell-Nr. /order no.	Typ /type	Farbe /colour	VPE: packaging unit:
5D.204.4455.0	WTPN 4 FSIL 5X20	grau / grey	50