


## Fixing



Characteristics	Floor-mounting pillar	Wall-fixing lugs	Post-fixing device	Blanking plates
	To protect cables entering the enclosure in outdoor installations. Cable entry section: 165 x 100 mm. For enclosures ref. <b>NSYPLM54G, NSYPLM54TG, NSYPLM64G and NSYPLM64TG.</b>	Set of 4 wall-fixing lugs. Mounted directly on the enclosure, either in horizontal position or in vertical position.	For outdoor installations on a post with a maximum circumference of 675 mm, Ø 215 mm.	They are positioned on the rear surface of the enclosures to block the openings in the corners in order to improve their appearance or prevent the entry of unwanted elements in the ventilation shaft. Supplied as standard for enclosure, ref. <b>NSYPLM108G.</b>
Material	Polyester reinforced with fibreglass	Polyamide loaded with fibreglass	Stainless-steel	Galvanised steel
Colour	RAL 7035 grey	RAL 7035	-	RAL 7035
Maximum load	-	<ul style="list-style-type: none"> <li>■ On PLM32</li> <li>□ vertical or horizontal: 10 kg</li> <li>■ Other PLM models</li> <li>□ vertical position: 200 kg</li> <li>□ horizontal position: 100 kg</li> </ul>	100 kg	-
Supply	Delivered with steel frame for secure fixing to the floor	Delivered with fixings	Supply of the rail, the strips and the fixings	-
	<b>Reference</b>	<b>References</b>	<b>For wall-mounting enclosure</b>	<b>References</b>
	<b>NSYSFSPLMG</b>	<b>NSYFPFLMG</b> <b>NSYFPFLM32G (1)</b>	<b>NSYPLM43G</b> <b>NSYPLM54G &amp; NSYPLM64G</b> <b>NSYPLM75G</b> <b>NSYPLM86G</b>	<b>NSYSFP300</b> <b>NSYSFP400</b> <b>NSYSFP500</b> <b>NSYSFP600</b>
		<b>NSYFPXPLM</b>		<b>NSYPLM32G</b> <b>NSYPLM43G &amp; NSYPLM54G</b> <b>NSYPLM64G, 75G and 86G</b> -
				<b>NSYCEPLMAG</b> <b>NSYCEPLMBG</b> <b>NSYCEPLMCG</b> -

(1) Exclusive for enclosures ref. **NSYPLM32G** and **NSYPLM32TG.**

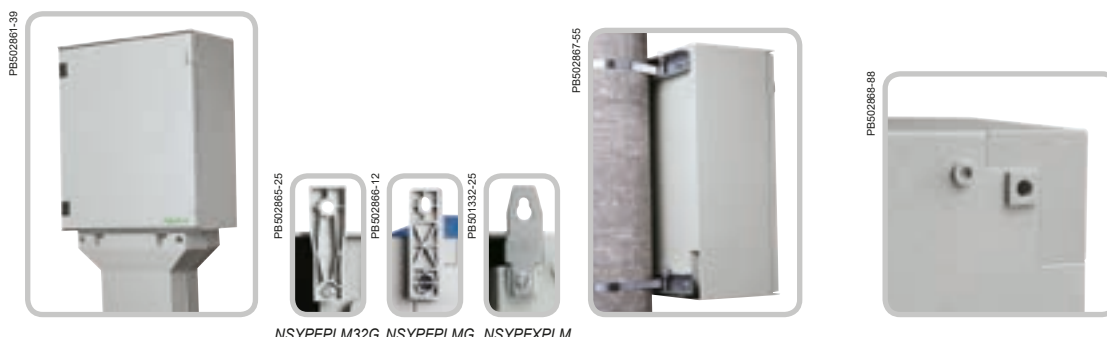

## Main

Range	Thalassa
Accessory / separate part category	Fixing accessory
Product or component type	Post fixing device
Application	Multi-purpose
For enclosure nominal dimensions	530 mmW: 430 mm D: 200 mm 647 mmW: 436 mm D: 250 mm
Mounting location	Outdoor installations on a post Rear of enclosure
Range compatibility	Thalassa PLM
Device composition	fixing elements 2 support rail 2 strip

## Complementary

Material	Galvanised steel
Fixing mode	By fixing element - on a post location
Permanent permissible load	100 kg
Height	45 mm
Width	395 mm
Depth	32.5 mm
Diameter	215 mm

## Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>

Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS declaration</a> Pro-active China RoHS declaration (out of China RoHS legal scope)
Environmental Disclosure	<a href="#">Product Environmental Profile</a>

**Contractual warranty**

Warranty	18 months
----------	-----------