



# TR Four Pole Distribution Block, 250 A – TR-250A (563170)



- Easily fixes onto asymmetric DIN rail or mounts with screws
- Bolts included for output connections
- Transparent protection cover
- Easy accessibility for wiring
- Ready to use out of the box, saving installation time and labor
- RoHS compliant

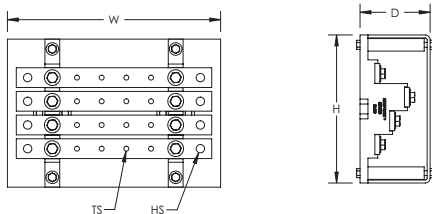

Part Number	TR-250A
Article Number	563170
Material	Copper Glass Fibre Reinforced Polyamide Plexiglass
Max Working Voltage, IEC (Ui)	630 V
Peak Short Circuit Current (Ipk)	34 kA
Short Term Withstand Current (Icw) 1s	17 kA
Line Side Number of Connections	2
Load Side Number of Connections	4
Hole Size (HS)	8 mm
Thread Size (TS)	M6
Depth [D]	68 mm
Height [H]	150 mm
Width [W]	230 mm
Unit Weight	1.3 kg
Flammability Rating	UL® 94V-0
Complies With	IEC® 60439.1 IEC® 61439.1 IEC® 60695-2-11 (Glow Wire Test 960 °C)
Certifications	EAC 0234267 (Russian Federation) RoHS

Part Number	TR-250A
Standard Packaging Quantity	1 pc
UPC	78285687807
EAN-13	3479775631707

Line side and load side number of connections are per pole.

IEC is a registered trademark of the International Electrotechnical Commission. UL, UR, cUL, cUR, cULus and cURus are registered certification marks of UL LLC.

**WARNING**

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at [www.erico.com](http://www.erico.com) and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

© 2019 nVent All rights reserved

nVent, nVent CADDY, nVent ERICO, nVent ERIFLEX and nVent LENTON are owned by nVent or its global affiliates.

All other trademarks are the property of their respective owners. nVent reserves the right to change specifications without prior notice.