


# Steel wall-mounting enclosures

## Accessories

### Fixing

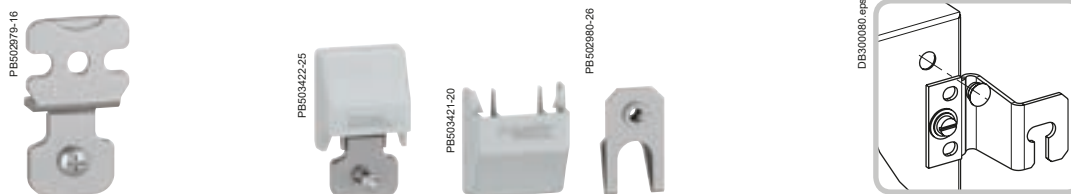

Characteristics	Wall-fixing lugs			Kit for heavy loads	Wall-fixing lugs with wall-enclosure separation	
	Set of 4 wall-fixing lugs. Mounted directly on the rear of the enclosure, either in horizontal or vertical position. Wall-enclosure separation of 12 mm. Do not use for dynamic loads.			Covers.	Kit made up of 2 reinforcement pieces. To be mounted before installing the mounting plate in top position with the standard lugs (to be ordered separately). This kit is mandatory for wall-mounting enclosures bigger than 800 x 800 mm.	Batch of 4 wall-fixing lugs. Separation of 40 mm from the wall at the rear of the enclosure. Need to drill a hole to prevent rotation.
Material	Passivated zinc-coated steel	304L stainless-steel	Passivated zinc-coated steel + PA	PA	Passivated zinc-coated steel	Passivated zinc-coated steel
Maximum load	250 kg			-	400 kg	100 kg
Supply	Supplied with fixing screws and pre-mounted sealing gaskets		4 fixing brackets + covers	Kit of 4 covers	-	-
<b>References</b>						
	For indoor enclosure	For outdoor enclosure				
	<b>NSYAEFPFSC</b>	<b>NSYAEFPFXSC</b>	<b>NSYAEFPFSC2*</b>	<b>NSYCAEFPF</b>	<b>NSYAEFAHLBSC</b>	<b>NSYAEFPF40SC</b>
	<p>Installation from the outside.</p> <p><b>Fixing centre-to-centre distance with lugs (M6/M8 screw)</b></p> <p>A: Enclosure height B: Enclosure width</p> <p>Vertical position. Horizontal position.</p>					

You will find the weights of the Spacial S3D enclosures without mounting plate in the selection guide on page 50.