FIBOX MNX PC 95/60 HT

Sample photo

Order symbol: PC 95/60 HT
Product nbr: 6011931

Description: Enclosure, PC
Remarks: Smoked transparent cover

EAN: 6418074054678
El. number:
Finland 3421372
Denmark 8212027747

Including: Base with PUR gasket and screws for mounting plate/DIN-rail, cover with polyamide cover screws and wing heads for cover screws.

Dimensions:	L	W	H
mm:	100	100	60
inch:	3.9	3.9	2.4

Materials:

Material:	PC
Base colour:	RAL 7035
Cover colour:	Smoked grey
Cover screws material:	Polyamide
Cover screws colour:	Black
Gasket material:	Polyurethane

Temperatures:

Short term:	-40 … 120 °C
Continuous:	-40 … 80 °C
Short term:	-40 … 250 °F
Continuous:	-40 … 175 °F

Accessories:

MIV 95	Mounting plate
B-3	DIN-35 Mounting rail

Rating:

Ingress Protection (EN 60529): IP 66/67
Impact Resistance (EN 50102): IK 08
Electrical insulation: Totally insulated
Halogen free (DIN/VDE 0472, Part 815): Yes
UV resistance: UL 508
Flammability Rating (UL 746 C 5): UL 94 5V
Glow Wire Test (IEC 695-2-1) °C: 960
NEMA Class: NEMA 1, 4, 4X, 6, 12, 13

Certificates:

Germanischer Lloyd (GL)
Underwriters Laboratories
Det Norske Veritas
Fimko
Europe EN 50298 1998
UL Canada
Gost R

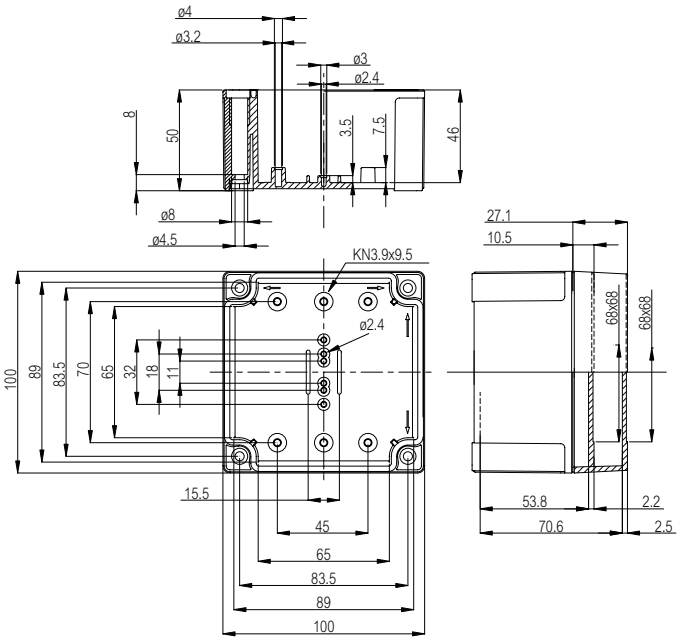

(c) Fibox OY, Data subject to change without notice