

## Data sheet

Commercial Art.No.: 81.000.6142.0

Switched-mode power supply WIPOS P1 12-10

wipos switched-mode power supply, nominal voltage: 12 V DC / 10A (setting range 11,4-14,5 V DC), sustained short-circuit protection, input voltage range: 115 V AC / 230 V AC, 210-370 V DC, single phase, W x H x D: 63,2 × 123,6 × 123,6 mm



Commercial Art.No.	81.000.6142.0
EAN	4049088106118
Order Unit	1

## Technical data

### General

Connection type	screw connection
Number of phases	Single phase power supply
Modular version	yes
Mounting type, other	No
Mounting type, wall mounting	No
Rail mounting possible	yes
Housing material	Metal
Operating temperature min.	-35 °C
Operating temperature max.	71 °C
relative humidity min.	20 %
relative humidity max.	95 %
Storage temperature / transport min.	85 °C
Storage temperature / transport max.	-35 °C
Degree of protection (IP)	IP20
Parallel-service possible	yes
Number of parallel switchable device	3

### Technical data

Function display	"DC OK" (LED green) (U(o) 17.6...19.4V)
function display "DC Low"	"DC Low" (LED red)
Short-circuit protective device	Strombegrenzung (fold forward)
temperature coefficient	±0,03%/K
ripple and noise	< 0.05 V
hold time 115V AC	> 25 ms
hold time 230V AC	> 30 ms
isolating voltage Output DC	4242 V

cohesive resistance (In-/Output)	100 MOhm
Derating	61°C...71°C: 2,5 %/K
cooling	free convection
MTBF	450.000h
Connector cross section (input)	min. 0,5mm <sup>2</sup> (AWG24) max. 6mm <sup>2</sup> (AWG10)
Connector cross section (output)	min. 0,5mm <sup>2</sup> (AWG24) max. 6mm <sup>2</sup> (AWG10)
Wire strip length	8 mm
Permissible torque max.	0.6 Nm
CE-Norm	EN55022 & EN61000-6-3, EN61000-3-2, EN61000-3-3, EN55024 & EN61000-6-2, EN61000-4-2, EN61000-4-3, EN61000-4-4, EN61000-4-5, EN61000-4-6, EN61000-4-8, EN61000-4-11, EN60204-1, EN61204-3
TÜV/safety	EN60950-1, EN61558-1, EN61558-2-16(erfüllt EN60204) , IRAM
Approval cULus	UL 508 Listed, UL60950-1 Recognized
Number of +	2
Number of -	2
Further terminals	L1, N, PE, NC (not used)

### Output

Type of output voltage	DC
Power output	120 W
Output voltage stabilized	yes
Output voltage	12 V
Min. output voltage	11.4 V
Max. output voltage	14.5 V
Min. output voltage	11.4 V
Max. output voltage	14.5 V
Output current	10 A

### Input

Type of voltage (input voltage)	
Primary voltage range	90 V
Min. input voltage	90 V
Max. input voltage	264 V
Rated frequency min.	47 Hz
Rated frequency max.	63 Hz
Input fuse	T3,15A / 250V (internal)

### Dimensions

Depth	123.6 mm
Width	63.2 mm
Height	123.6 mm
Mounting Distance horizontal	25 mm
Mounting Distance vertical	25 mm
Weight	920 g


### Classification

ECLASS 11	
ECLASS 8.1	27049002
ETIM 7.0	EC002540
ETIM 6.0	EC002540
ETIM 5.0	EC002540

**Product compliance**

ROHS conformity status	Compliant
REACH-SVHC conformity status	Compliant

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung  
 seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet.  
 The reproduction, distribution and utilization of this document as well as the  
 communication of its contents to others without express authorization is prohibited.

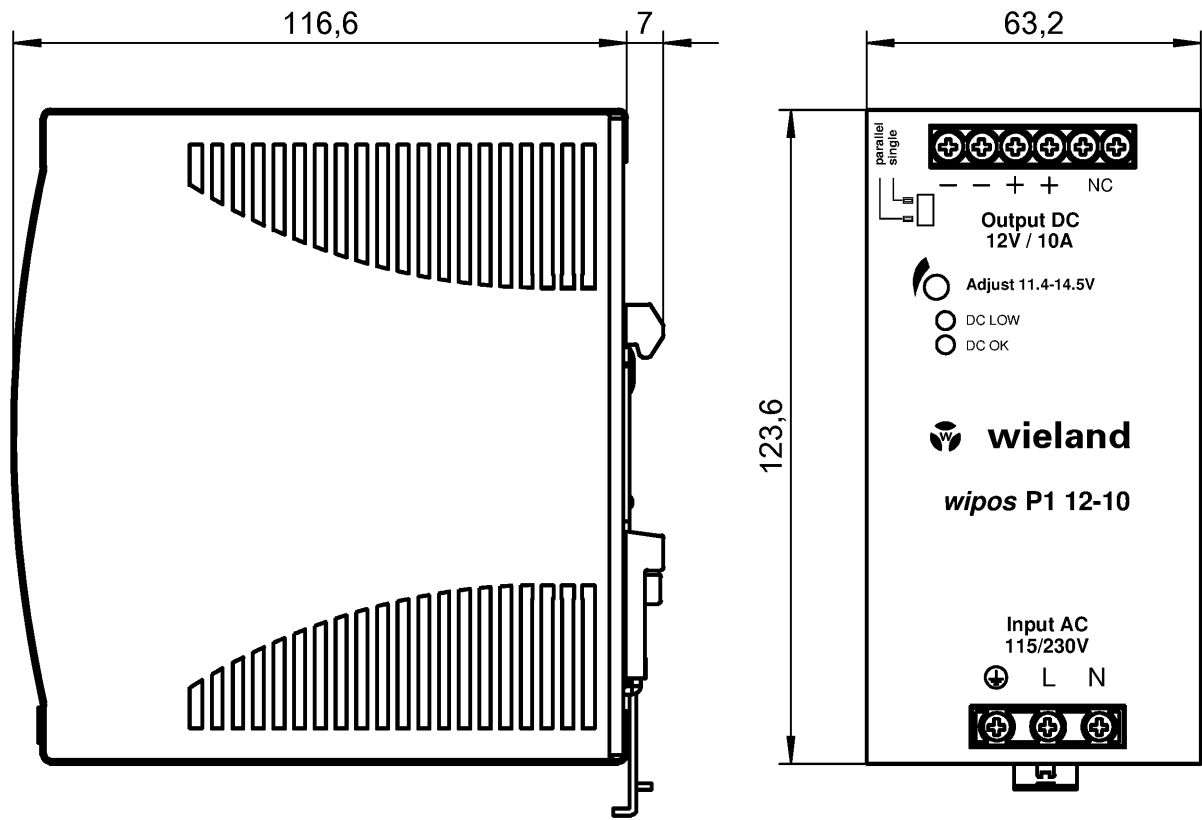

Qu - PEE 12/92

Weitere Angaben siehe KATALOG oder eKatalog.  
Additional data see CATALOG or eCatalog.

[www.wieland-electric.com](http://www.wieland-electric.com)  
[eshop.wieland-electric.com](http://eshop.wieland-electric.com)

ja/yes  Stoffverbots- und Deklarationsliste nach WN 5020.010 ist einzuhalten.  
Conformity with Wieland document WN 5020.010 e (list of prohibited / declarable hazardous substances) to be declared!

Freitoleranz nach General tolerance		CAD-Zeichnung, keine manuellen Änderungen CAD-Drawing, no manual modifications allowed			1. Verwendung: First Use:		Blatt: Sheet:		
		Werkstoff/ Material		2016	Tag/ Date	Name		Zeichnung Nr./ Drawing No.	
				gezeichnet drawn	04.03.	Koetzner		<b>81.000.6142.0 01K</b>	
		Maßstab/Scale		geprüft checked					
		Datei/ File: 033791__01K.DCD		Ersatz für/ Replacement for:		Maße in mm/Dimensions are in mm			
		 <b>wieland</b> <a href="http://www.wieland-electric.com">www.wieland-electric.com</a>		Type		Benennung/ Title			
Index				Datum/ Blatt Date/ Sheet				Teilespezifikation / Component specification <b>Schaltnetzteil / Switching Power Supply</b> <b>wipos P1 12 VDC / 10 A 1PH</b>	
Änderung/ Revision									

A  
1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
M1  
M2  
M3  
L  
G  
i  
11.1  
12.1  
1.1