


Data sheet

Commercial Art.No.: 5D.S03.4455.0

fuse terminal WTN 2.5 FSI 5X20

fuse terminal WTN 2.5 FSI 5X20 rated voltage 400 V, rated current 6.3 A, screw connection, number of levels 1, number of clamp positions per level 1, nominal cross section 2.5 mm², connectable conductor cross section fine stranded without cable end sleeve 0,34mm² - 2,5mm², mounting method DIN rail (top hat rail), color grey, width/grid dimension 5.1 mm, inflammability class of insulation material acc. with ul94 V0

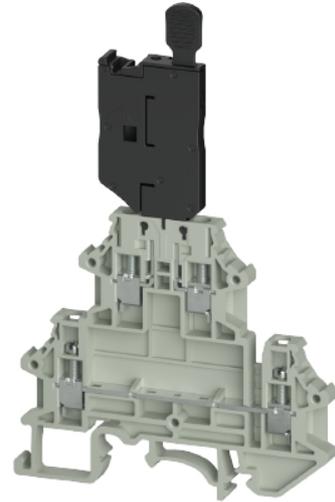

Commercial Art.No.	5D.S03.4455.0
EAN	4049088724589
Order Unit	50

certificates / approvals



Technical data

general

nominal cross section	2.5 mm ²
color	grey
number of levels	1
number of clamp positions per level	1
width/grid dimension	5.1 mm
insulating housing	PA
inflammability class of insulation material acc. with UL94	V0
mounting method	DIN rail (top hat rail)
Anschlussart	screw connection
Anzahl der Klemmstellen je Etage	1
Montageart	DIN rail (top hat rail)
Brennbarkeitsklasse des Isolierstoffs	V0

technical data

rated current	6.3 A
rated voltage	400 V
rated impulse voltage	4 kV
pollution degree	3
closing plate required	yes
type of insulation material	thermoplastic
length	40.7 mm
width	6.2 mm

height	90.1 mm
--------	---------

connection data

connection type	screw connection
connection type 1	screw connection
minimum cross section solid	0.34 mm ²
maximum cross section solid	4 mm ²
minimum cross section fine stranded	0.34 mm ²
maximum cross section fine stranded	2.5 mm ²
minimum conductor cross section (flex., stranded) with cable end sleeve	0.25 mm ²
maximum conductor cross section (flex., stranded) with cable end sleeve	2.5 mm ²
wire strip length	10 mm
torque conductor mounting	0.4 Nm

technical data UL/CSA

cross section UL	22-12 AWG
voltage UL	300 V
current factory wiring	10 A
current field wiring	10 A
cross section CSA	22-12 AWG
voltage CSA	300 V
current CSA	10 A

classification

ETIM 9.0	EC000899
----------	----------



product compliance

REACH-SVHC conformity status	compliant
------------------------------	-----------

Accessories


Commercial Art.No.:	Article-type description:	Description:
0D.S04.2055.0	end plate APWTN 2.5/4	end plate inflammability class of insulation material acc. with ul94 V0, type of end plate yes, thickness 1.2 mm, length 39.2 mm, color grey
0D.202.7281.0	marking strips WML 9.8/60	marking strips WML 9.8/60 material plastic, color white, length 230 mm, height 15.1 mm, inflammability class of insulation material acc. with ul94 V0
0D.203.7056.0	marking plate WMP 5,10-10	marking plate WMP 5,10-10 modular spacing 5.1 mm, material plastic, color white, length 128 mm, height 76 mm, inflammability class of insulation material acc. with ul94 V0
0D.S23.3227.0	insert bridge IVB WTN 2.5-2 IN	insert bridge IVB WTN 2.5-2 IN modular spacing 5.1 mm, insulated yes, number of poles 2, color grey, height 19 mm, mounting method screwable, inflammability class of insulation material acc. with ul94 V0
0D.S23.3327.0	insert bridge IVB WTN 2.5-3 IN	insert bridge IVB WTN 2.5-3 IN modular spacing 5.1 mm, insulated yes, number of poles 3, color grey, height 19 mm, mounting method screwable, inflammability class of insulation material acc. with ul94 V0
0D.S23.3427.0	insert bridge IVB WTN 2.5-4 IN	insert bridge IVB WTN 2.5-4 IN modular spacing 5.1 mm, insulated yes, number of poles 4, color grey, height 19 mm, mounting method screwable, inflammability class of insulation material acc. with ul94 V0

0D.S23.3527.0	insert bridge IVB WTN 2.5-5 IN	insert bridge IVB WTN 2.5-5 IN modular spacing 5.1 mm, insulated yes, number of poles 5, color grey, height 19 mm, mounting method screwable, inflammability class of insulation material acc. with ul94 V0
0D.S23.4027.0	insert bridge IVB WTN 2.5-10 IN	insert bridge IVB WTN 2.5-10 IN modular spacing 5.1 mm, insulated yes, number of poles 10, color grey, height 19 mm, mounting method screwable, inflammability class of insulation material acc. with ul94 V0

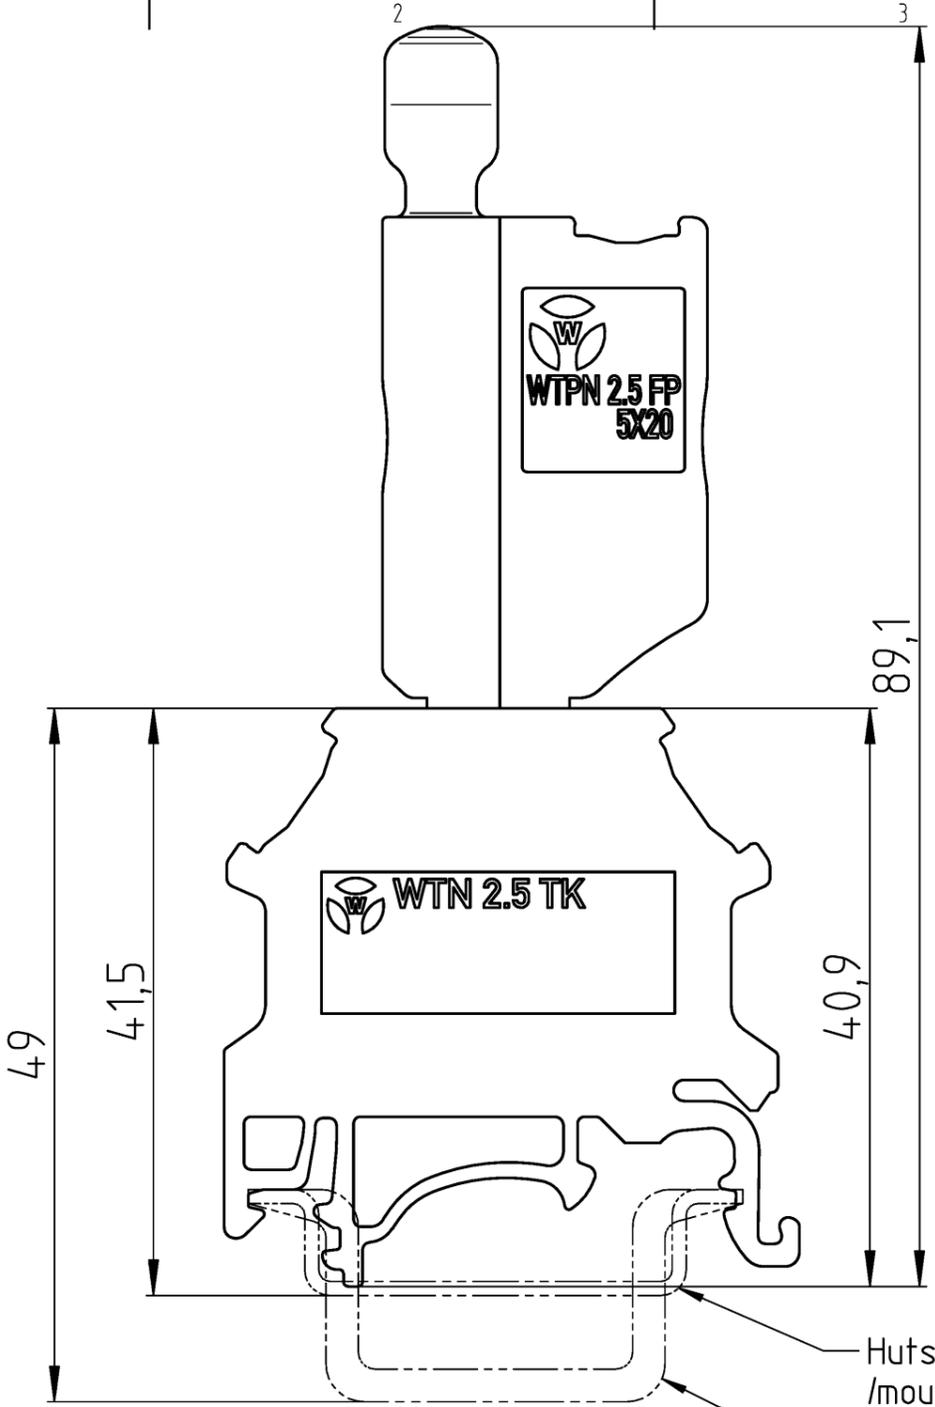

Hutschiene EN 60715-35x7,5
/mounting rail EN 60715-35x7,5

Hutschiene EN 60715-35x15
/mounting rail EN 60715-35x15

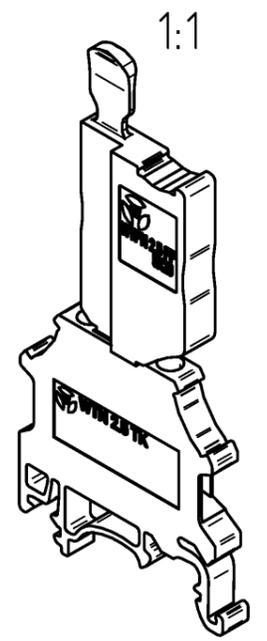

Weitere Daten siehe KATALOG oder eKatalog
additional data see CATALOG or eCATALOG

www.wieland-electric.com
eshop.wieland-electric.com

Tolerierung Size ISO 14405 © / Tolerance system Size ISO 14405 ©. (This ISO-standard describes the envelope principle. According to the envelope principle the deviations of form and parallelism are limited by the size tolerances).		ja/yes <input checked="" type="checkbox"/> Stoffverbots- und Deklarationsliste nach WN 5020.010 ist einzuhalten. Conformity with Wieland document WN 5020.010 e (list of prohibited / declarable hazardous substances) to be declared!	
Freitoleranz nach General tolerance		CAD - Zeichnung, keine manuellen Änderungen CAD - drawing, no manual modifications allowed	
1. Verwendung: First Use:		Blatt: 1 von 1 Sheet: 1 of 1	
Werkstoff / Material		Tag/Date	Name
Maßstab / Scale		18.09.2025	Sachs (extern)
2:1		Elektronische Freigabe Electronic Release	
Vol. mm ³ / fl./Srf. mm ²		Ersatz für / Replacement for:	
Index Datum / Blatt Date / Sheet		Type Benennung/Title	
Änderung / Revision		SICHERUNGSKLEMME fuse terminal	

Bestell-Nr. /order no.	Typ /type	Farbe /colour	VPE: packaging unit:
5D.S03.4455.0	WTN 2.5 FSI 5X20	grau / grey	50
5D.S03.4555.0	WTN 2.5 FSI60 5X20	grau / grey	50

A
Alle Rechte vorbehalten
All rights reserved
Vertraulich
Confidential

B
These dimensions will be especially checked at delivery
Only inspection dimensions
With /E marked dimensions are only valid for internal use

C
Diese Maße werden bei Abnahme besonders geprüft
Ausschließlich Prüfmaße
Mit /E gekennzeichnete Maße sind nur für interne Zwecke gültig

F